

# LED Catalog

Lamps & Fixtures • Fall 2016



**EiKO**<sup>®</sup>  
CERTIFIED GREEN

**LITESPANLED**

selection. solutions. simplicity. [eiko.com](http://eiko.com)

# Contents

<b>LED Replacement Lamps .....</b>	<b>2</b>
HID Replacement Lamps .....	2
PL CFL Replacement Lamps .....	5
Linear Tubes.....	6
PLL Replacement Lamps .....	9
Filament Dimmable Decorative Lamps .....	10
Decorative Replacement Lamps .....	11
A19/A21 Replacement Lamps .....	12
BR Replacement Lamps .....	16
PAR Replacement Lamps .....	18
Miniature Reflector Replacement Lamps .....	20
G4 & G9 Replacement Lamps.....	22
<b>LED Fixtures .....</b>	<b>23</b>
LLW : Linear Wrap.....	23
SLM : Slim Panel.....	24
VOL : Volumetric Troffer .....	25
Downlight Kit.....	26
LLH : Linear Highbay.....	28
LRH : Round Highbay .....	29
VTS : Vapor Tight Surface.....	30
AFL : Area Flood Light.....	31
ASL : Area Site Lighter .....	32
FLM : Flood Light Mini.....	33
WFA : Wallpack Flood Arch .....	34
WPG : Wallpack Glass .....	35
WPT : Wallpack Trapezoid .....	36
DTD : Dusk-to-Dawn.....	37
WPC : Wallpack Cube.....	38
WPW : Wallpack Wedge .....	39
SCSS : Surface Canopy Square, Small/Shallow .....	40
SCRS : Surface Canopy Round, Shallow .....	41
SCSM/L : Surface Canopy Square, Medium/Large.....	42
<b>LitespanLED® Wire Rack Display Merchandiser.....</b>	<b>43</b>
<b>Ordering Information, Terms &amp; Conditions .....</b>	<b>44</b>



## HID Replacement Lamps

- LED HID replacement lamps for high wattage HID fixtures
- Consumes a fraction of the energy of HID systems
- Lasts many times longer than HID
- Available in a wide range of wattages and sizes
- Eliminates maintenance costs for over 10 years
- State-of-the-art LED light sources deliver ultra-high lpw
- Medium base and mogul base styles available
- Choice of 4000K or 5000K CCT

### HID Replacement : Small : Medium Base

Order Code	Item	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Replaces HID	Photo #	LDL
09390	LED15WPT40KMED-G7	1,875	15W	4000K	80+	100-277V	50K	E26	50W	1	✗
09391	LED15WPT50KMED-G7	1,950	15W	5000K	80+	100-277V	50K	E26	50W	1	✗
09392	LED19WPT40KMED-G7	2,375	19W	4000K	80+	100-277V	50K	E26	70W	1	✗
09393	LED19WPT50KMED-G7	2,470	19W	5000K	80+	100-277V	50K	E26	70W	1	✗
09394	LED24WPT40KMED-G7	3,000	24W	4000K	80+	100-277V	50K	E26	100W	1	✗
09395	LED24WPT50KMED-G7	3,120	24W	5000K	80+	100-277V	50K	E26	100W	1	✗

✗ Lighting Design Lab Qualified

### HID Replacement : Medium : Medium Base

Order Code	Item	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Replaces HID	Photo #	LDL
09374	LED27WPT40KMED-G7	3,510	27W	4000K	80+	100-277V	50K	E26	125W	2	✗
09376	LED27WPT50KMED-G7	3,645	27W	5000K	80+	100-277V	50K	E26	125W	2	✗
09378	LED36WPT40KMED-G7	4,680	36W	4000K	80+	100-277V	50K	E26	150W	2	✗
09380	LED36WPT50KMED-G7	4,860	36W	5000K	80+	100-277V	50K	E26	150W	2	✗
09382	LED45WPT40KMED-G7	5,850	45W	4000K	80+	100-277V	50K	E26	175W	2	✗
09384	LED45WPT50KMED-G7	6,075	45W	5000K	80+	100-277V	50K	E26	175W	2	✗
09386	LED54WPT40KMED-G7	7,020	54W	4000K	80+	100-277V	50K	E26	250W	2	✗
09388	LED54WPT50KMED-G7	7,290	54W	5000K	80+	100-277V	50K	E26	250W	2	✗

✗ Lighting Design Lab Qualified



## HID Replacement : Medium : Mogul Base

Order Code	Item	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Replaces HID	Photo #	DLC v4.0
09375	LED27WPT40KMOG-G7	3,510	27W	4000K	80+	100-277V	50K	EX39	125W	2	✓
09377	LED27WPT50KMOG-G7	3,645	27W	5000K	80+	100-277V	50K	EX39	125W	2	✓
09379	LED36WPT40KMOG-G7	4,680	36W	4000K	80+	100-277V	50K	EX39	150W	2	✓
09381	LED36WPT50KMOG-G7	4,860	36W	5000K	80+	100-277V	50K	EX39	150W	2	✓
09383	LED45WPT40KMOG-G7	5,850	45W	4000K	80+	100-277V	50K	EX39	175W	2	✓
09385	LED45WPT50KMOG-G7	6,075	45W	5000K	80+	100-277V	50K	EX39	175W	2	✓
09387	LED54WPT40KMOG-G7	7,020	54W	4000K	80+	100-277V	50K	EX39	250W	2	✓
09389	LED54WPT50KMOG-G7	7,290	54W	5000K	80+	100-277V	50K	EX39	250W	2	✓
09428	LED54WPT40KMOG-347V-G7*	6,480	54W	4000K	80+	120-347V	50K	E39	175-250W	2	✓
09450	LED54WPT50KMOG-347V-G7*	6,750	54W	5000K	80+	120-347V	50K	E39	175-250W	2	✓

\* Canada only.

✓ DesignLights Consortium® Qualified

## HID Replacement : Large : Mogul Base

Order Code	Item	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Replaces HID	Photo #	DLC v4.0
09346	LED80WPT40KMOG-G6	9,300	80W	4000K	80+	100-277V	50K	EX39	320W HID	3	✓
09347	LED80WPT50KMOG-G6	9,300	80W	5000K	80+	100-277V	50K	EX39	320W HID	3	✓
09348	LED100WPT40KMOG-G6	11,900	100W	4000K	80+	100-277V	50K	EX39	400W HID	3	✓
09153	LED100WPT50KMOG-G6	11,900	100W	5000K	80+	100-277V	50K	EX39	400W HID	3	✓
09451	LED100WPT40KMOG-347V-G7*	11,900	100W	4000K	80+	120-347V	50K	EX39	250-400W	3	
09452	LED100WPT50KMOG-347V-G7*	11,900	100W	5000K	80+	120-347V	50K	EX39	250-400W	3	
09349	LED120WPT40KMOG-G6	14,300	120W	4000K	80+	100-277V	50K	EX39	600W HID	3	✓
09154	LED120WPT50KMOG-G6	14,300	120W	5000K	80+	100-277V	50K	EX39	600W HID	3	✓

\* Canada only.

✓ DesignLights Consortium® Qualified

## HID Replacement : Horizontal : Mogul Base

Order Code	Item	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Bm	Replaces HID	Photo #	DLC v4.0
09402	LED20WPT/180/40KMOG-G7	2,700	20W	4000K	80+	100-277V	50K	E39	180°	100W	4	✓
09403	LED20WPT/180/50KMOG-G7	2,800	20W	5000K	80+	100-277V	50K	E39	180°	100W	4	✓
09404	LED30WPT/180/40KMOG-G7	4,050	30W	4000K	80+	100-277V	50K	E39	180°	175W	4	✓
09405	LED30WPT/180/50KMOG-G7	4,200	30W	5000K	80+	100-277V	50K	E39	180°	175W	4	✓
09406	LED40WPT/180/40KMOG-G7	5,400	40W	4000K	80+	100-277V	50K	E39	180°	250W	4	✓
09407	LED40WPT/180/50KMOG-G7	5,600	40W	5000K	80+	100-277V	50K	E39	180°	250W	4	✓

✓ DesignLights Consortium® Qualified

## HID Replacement : Omnidirectional : Medium Base

Order Code	Item	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Replaces HID	Photo #
08776	LED27WPT40KMED-G5*	3,000	27W	4000K	80+	100-277V	50K	E26	50-100W HID	5
09021	LED27WPT50KMED-G5*	3,240	27W	5000K	80+	100-277V	50K	E26	50-100W HID	5
08777	LED36WPT40KMED-G5*	4,000	36W	4000K	80+	100-277V	50K	E26	100-150W HID	5
09023	LED36WPT50KMED-G5*	4,325	36W	5000K	80+	100-277V	50K	E26	100-150W HID	5

Continued on next page >>>



# LED Replacement Lamps

Order Code	Item	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Replaces HID	Photo #
<b>08778</b>	LED45WPT40KMED-G5*	5,000	45W	4000K	80+	100-277V	50K	E26	150-175W HID	5
<b>09025</b>	LED45WPT50KMED-G5*	5,400	45W	5000K	80+	100-277V	50K	E26	150-175W HID	5
<b>08779</b>	LED54WPT40KMED-G5*	6,000	54W	4000K	80+	100-277V	50K	E26	175-250W HID	5

\*While supplies last.

## HID Replacement : Omnidirectional : Mogul Base

Order Code	Item	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Replaces HID	Photo #	DLC v3.1
<b>08772</b>	LED27WPT40KMOG-G5*	3,000	27W	4000K	80+	100-277V	50K	E39	50-100W HID	5	✓
<b>09022</b>	LED27WPT50KMOG-G5*	3,240	27W	5000K	80+	100-277V	50K	E39	50-100W HID	5	✓
<b>08773</b>	LED36WPT40KMOG-G5*	4,000	36W	4000K	80+	100-277V	50K	E39	100-150W HID	5	✓
<b>09024</b>	LED36WPT50KMOG-G5*	4,325	36W	5000K	80+	100-277V	50K	E39	100-150W HID	5	✓
<b>08774</b>	LED45WPT40KMOG-G5*	5,000	45W	4000K	80+	100-277V	50K	E39	150-175W HID	5	✓
<b>09026</b>	LED45WPT50KMOG-G5*	5,400	45W	5000K	80+	100-277V	50K	E39	150-175W HID	5	✓
<b>08775</b>	LED54WPT40KMOG-G5*	6,000	54W	4000K	80+	100-277V	50K	E39	175-250W HID	5	✓
<b>09028</b>	LED54WPT50KMOG-G5*	6,480	54W	5000K	80+	100-277V	50K	E39	175-250W HID	5	✓
<b>09030</b>	LED100WPT40KMOG-G5*	12,500	100W	4000K	80+	100-277V	50K	E39	250-400W HID	5	

\*While supplies last.

✓ DesignLights Consortium® Qualified thru April 2, 2017

## HID Replacement : Post-Top : Medium Base

Order Code	Item	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Photo #
<b>08847</b>	C0820-PT-25W-23K-N61-E26-DN-W	1,880 +/-200	25W	2300K	70+	120-277 VAC	50K	E26	6
<b>08752</b>	C0820-PT-25W-40K-N61-E26-DN-W	2,700 +/-200	25W	4000K	70+	120-277 VAC	50K	E26	6
<b>08754</b>	C0820-PT-40W-40K-N61-E26-DN-W	4,200 +/- 200	40W	4000K	70+	120-277 VAC	50K	E26	6

## HID Replacement : Post-Top : Mogul Base

Order Code	Item	Lm	W	CCT	CRI	V	Life/Hrs L70	Base	Photo #
<b>09264</b>	C0820-PT-25W-23K-N61-E39-DN-W	1,880	25W	2300K	70+	120-277 VAC	50K	E39	6
<b>08753</b>	C0820-PT-25W-40K-N61-E39-DN-W	2,700	25W	4000K	70+	120-277 VAC	50K	E39	6
<b>09316</b>	C0820-PT-25W-50K-N61-E39-DN-W	2,800	25W	5000K	70+	120-277 VAC	50K	E39	6
<b>08755</b>	C0820-PT-40W-40K-N61-E39-DN-W	4,200	40W	4000K	70+	120-277 VAC	50K	E39	6



## PL CFL Replacement Lamps

- Directly replaces PL compact fluorescent lamps
- Direct fit plug-and-play solution
- Available in horizontal or vertical orientation
- Choice of 2700K, 3000K, 3500K and 4000K CCT
- Instant-on with no warmup, unlike compact fluorescent
- Shatter-resistant for reduced risk of injury and breakage
- Dimmable models available (ballast dependent)
- Environmentally friendly; contains no glass, lead or mercury

### PL Replacement : Direct Fit : Magnetic Ballast Compatible : 2-Pin

Order Code	Item	Lm	W	CCT	CRI	Orientation	Life/Hrs L70	Base	Replaces	Photo #
09332	LED9W2PH/827DR-G6	850	9W	2700K	80+	Horizontal	50K	G24d-3, GX24d-3	26W 2-pin quad & triple	1
09250	LED9W2PH/830DR-G6	850	9W	3000K	80+	Horizontal	50K	G24d-3, GX24d-3	26W 2-pin quad & triple	1
09251	LED9W2PH/835DR-G6	850	9W	3500K	80+	Horizontal	50K	G24d-3, GX24d-3	26W 2-pin quad & triple	1
09252	LED9W2PH/840DR-G6	900	9W	4000K	80+	Horizontal	50K	G24d-3, GX24d-3	26W 2-pin quad & triple	1
09334	LED9W2PV/827DR-G6	850	9W	2700K	80+	Vertical	50K	G24d-3, GX24d-3	26W 2-pin quad & triple	2
09253	LED9W2PV/830DR-G6	850	9W	3000K	80+	Vertical	50K	G24d-3, GX24d-3	26W 2-pin quad & triple	2
09254	LED9W2PV/835DR-G6	850	9W	3500K	80+	Vertical	50K	G24d-3, GX24d-3	26W 2-pin quad & triple	2
09255	LED9W2PV/840DR-G6	900	9W	4000K	80+	Vertical	50K	G24d-3, GX24d-3	26W 2-pin quad & triple	2

### PL Replacement : Direct Fit : Electronic Ballast Compatible : 4-Pin

Order Code	Item	Lm	W	CCT	CRI	Orientation	Life/Hrs L70	Base	Replaces	Photo #	LDL
09331	LED9W4PH/827DR-G6	850	9W	2700K	80+	Horizontal	50K	G24q-3, GX24q-3, GX24q-4	26/32/42W 4-pin quad & triple	3	
09244	LED9W4PH/830DR-G6	850	9W	3000K	80+	Horizontal	50K	G24q-3, GX24q-3, GX24q-4	26/32/42W 4-pin quad & triple	3	✘
09245	LED9W4PH/835DR-G6	850	9W	3500K	80+	Horizontal	50K	G24q-3, GX24q-3, GX24q-4	26/32/42W 4-pin quad & triple	3	✘
09246	LED9W4PH/840DR-G6	900	9W	4000K	80+	Horizontal	50K	G24q-3, GX24q-3, GX24q-4	26/32/42W 4-pin quad & triple	3	✘
09333	LED9W4PV/827DR-G6	850	9W	2700K	80+	Vertical	50K	G24q-3, GX24q-3, GX24q-4	26/32/42W 4-pin quad & triple	4	
09247	LED9W4PV/830DR-G6	850	9W	3000K	80+	Vertical	50K	G24q-3, GX24q-3, GX24q-4	26/32/42W 4-pin quad & triple	4	✘
09248	LED9W4PV/835DR-G6	850	9W	3500K	80+	Vertical	50K	G24q-3, GX24q-3, GX24q-4	26/32/42W 4-pin quad & triple	4	✘
09249	LED9W4PV/840DR-G6	900	9W	4000K	80+	Vertical	50K	G24q-3, GX24q-3, GX24q-4	26/32/42W 4-pin quad & triple	4	✘

✘ Lighting Design Lab Qualified





## Linear Tubes

- Solid state replacement for T5, T8 and T12 linear fluorescent
- Available in line voltage/ballast bypass, direct fit, and hybrid dual mode for a range of installation options
- Available in shatterproof nano-polycarbonate versions
- Ultra-high performance LEDs deliver exceptional lpw
- Instant energy savings
- Choice of 3500K, 4000K or 5000K CCT
- Instant-on with no warm up like fluorescents

Visit [eiko.com](http://eiko.com) to view complete ballast compatibility information.

### T8 LED Dual Mode : Ballast Bypass/Electronic Instant Start Ballast Compatible : **DLC v3.1**


Order Code	Item	Length	Lm	Nominal Lamp W	System W w/ Ballast	V (Ballast Dependent)	CCT	CRI	Glass Tube	Bm	Life/ Hrs	Photo #	DLC v3.1
09291	LED15WT8F/48/840K-G7DM	4'	1,800	15W	17.5W	120-277V	4000K	80+	Frosted	220°	50K	1	✓
09292	LED15WT8F/48/850K-G7DM	4'	1,800	15W	17.5W	120-277V	5000K	80+	Frosted	220°	50K	1	✓

✓ DesignLights Consortium® Qualified thru April 2, 2017

### T8 LED Direct Fit : Electronic Ballast Compatible Dimmable/Emergency Tubes : **DLC v3.1**

Order Code	Item	Length	Lm	Nominal Lamp W	System W (Ballast Dependent)	V (Ballast Dependent)	CCT	CRI	Glass Tube	Bm	Life/ Hrs	Photo #	DLC v3.1
09350	LED11T8F/24/835-G6DR	2'	1,100	9W	11W	120-277V, 347V	3500K	80+	Frosted	220°	50K	2	✓
09270	LED11T8F/24/840-G6DR	2'	1,150	9W	11W	120-277V, 347V	4000K	80+	Frosted	220°	50K	2	✓
09358	LED11T8F/24/850-G6DR	2'	1,150	9W	11W	120-277V, 347V	5000K	80+	Frosted	220°	50K	2	✓
09356	LED14T8F/36/835-G6DR	3'	1,400	11W	13W	120-277V, 347V	3500K	80+	Frosted	220°	50K	2	
09269	LED14T8F/36/840-G6DR	3'	1,450	11W	13W	120-277V, 347V	4000K	80+	Frosted	220°	50K	2	
09357	LED14T8F/36/850-G6DR	3'	1,450	11W	13W	120-277V, 347V	5000K	80+	Frosted	220°	50K	2	
09167	LED18T8F/48/835-G6DR	4'	1,700	14W	17W	120-277V, 347V	3500K	80+	Frosted	220°	50K	2	✓
09168	LED18T8F/48/840-G6DR	4'	1,800	14W	17W	120-277V, 347V	4000K	80+	Frosted	220°	50K	2	✓

Continued on next page >>>

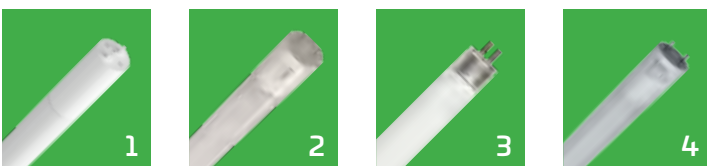

5 YEAR WARRANTY

UL US

CLASSIFIED  
UL US

DLC QUALIFIED LISTED

Order Code	Item	Length	Lm	Nominal Lamp W	System W (Ballast Dependent)	V (Ballast Dependent)	CCT	CRI	Glass Tube	Bm	Life/Hrs	Photo #	DLC v3.1
09169	LED18T8F/48/850-G6DR	4'	1,800	14W	17W	120-277V, 347V	5000K	80+	Frosted	220°	50K	2	✓
09176	LED22T8F/48/840-G6DR	4'	2,200	17W	19.5W	120-277V, 347V	4000K	80+	Frosted	220°	50K	2	✓
09177	LED22T8F/48/850-G6DR	4'	2,200	17W	19.5W	120-277V, 347V	5000K	80+	Frosted	220°	50K	2	✓
09302	LED22T8F/48/835-G6DR-M*	1160mm	2,200	17W	20W	120-277V, 347V	3500K	80+	Frosted	220°	50K	2	
09290	LED22T8F/48/840-G6DR-M*	1160mm	2,200	17W	20W	120-277V, 347V	4000K	80+	Frosted	220°	50K	2	

\* Canada only.

✓ DesignLights Consortium® Qualified thru April 2, 2017

## T5 LED Direct Fit : Electronic Ballast Compatible Dimmable/Emergency Tubes : DLC v3.1

Order Code	Item	Length	Lm	Nominal Lamp W	System W	V (Ballast Dependent)	CCT	CRI	Glass Tube	Bm	Life/Hrs	Photo #	DLC v3.1
09475	LED32T5HO/46/835-G6DR	46"	3,200	25W	28W	120-277V, 347V	3500K	80+	Frosted	185°	50K	3	✓
09178	LED32T5HO/46/840-G6DR	46"	3,200	25W	28W	120-277V, 347V	4000K	80+	Frosted	185°	50K	3	✓
09179	LED32T5HO/46/850-G6DR	46"	3,200	25W	28W	120-277V, 347V	5000K	80+	Frosted	185°	50K	3	✓

✓ DesignLights Consortium® Qualified thru April 2, 2017

## T8 LED Line Voltage : Bypass Nano-Polycarbonate Tubes : DLC v4.0

Order Code	Item	Length	Lm	W	CCT	CRI	Appearance	Envelope	Bm	Life/Hrs	Photo #	DLC v4.0
09368	LED9WT8/P/24/835-G7D	2'	1,100	9W	3500K	80+	Frosted	Nano-Polycarb	210°	50K	4	✓
09369	LED9WT8/P/24/840-G7D	2'	1,150	9W	4000K	80+	Frosted	Nano-Polycarb	210°	50K	4	✓
09370	LED9WT8/P/24/850-G7D	2'	1,150	9W	5000K	80+	Frosted	Nano-Polycarb	210°	50K	4	✓
09359	LED14WT8/P/48/835-G7D	4'	1,700	14W	3500K	80+	Frosted	Nano-Polycarb	210°	50K	4	✓
09360	LED14WT8/P/48/840-G7D	4'	1,800	14W	4000K	80+	Frosted	Nano-Polycarb	210°	50K	4	✓
09361	LED14WT8/P/48/850-G7D	4'	1,800	14W	5000K	80+	Frosted	Nano-Polycarb	210°	50K	4	✓
09362	LED17WT8/P/48/835-G7D	4'	2,100	17W	3500K	80+	Frosted	Nano-Polycarb	210°	50K	4	✓
09363	LED17WT8/P/48/840-G7D	4'	2,200	17W	4000K	80+	Frosted	Nano-Polycarb	210°	50K	4	✓
09364	LED17WT8/P/48/850-G7D	4'	2,200	17W	5000K	80+	Frosted	Nano-Polycarb	210°	50K	4	✓

✓ DesignLights Consortium® Qualified

## T8 LED Line Voltage : Premium Bypass Tubes : DLC v4.0


Order Code	Item	Length	Lm	W	LPW	CCT	CRI	Appearance	Envelope	Bm	Life/Hrs	Photo #	DLC v4.0
09371	LED12WT8/PRM/48/835-G7D	4'	1,700	12.5W	140+	3500K	80+	Frosted	Glass	210°	50K	5	✓
09372	LED12WT8/PRM/48/840-G7D	4'	1,800	12.5W	140+	4000K	80+	Frosted	Glass	210°	50K	5	✓
09373	LED12WT8/PRM/48/850-G7D	4'	1,800	12.5W	140+	5000K	80+	Frosted	Glass	210°	50K	5	✓

✓ DesignLights Consortium® Qualified

## T8 LED Line Voltage : Bypass Glass Tubes : DLC v4.0

Order Code	Item	Length	Lm	W	CCT	CRI	Appearance	Envelope	Bm	Life/Hrs	Photo #	DLC v4.0
09322	LED9WT8F/24/835K-G7D	2'	1,100	9W	3500K	80+	Frosted	Glass	210°	50K	5	✓
09323	LED9WT8F/24/840K-G7D	2'	1,150	9W	4000K	80+	Frosted	Glass	210°	50K	5	✓
09324	LED9WT8F/24/850K-G7D	2'	1,150	9W	5000K	80+	Frosted	Glass	210°	50K	5	✓

Continued on next page >>>

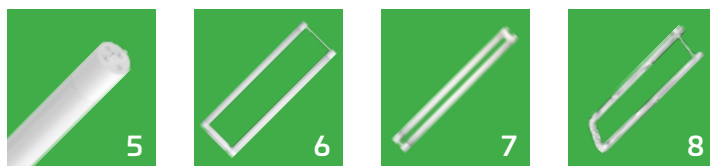



# LED Replacement Lamps

Order Code	Item	Length	Lm	W	CCT	CRI	Appearance	Envelope	Bm	Life/Hrs	Photo #	DLC v4.0
09319	LED12WT8F/36/835K-G7D	3'	1,400	12W	3500K	80+	Frosted	Glass	210°	50K	5	
09320	LED12WT8F/36/840K-G7D	3'	1,450	12W	4000K	80+	Frosted	Glass	210°	50K	5	
09321	LED12WT8F/36/850K-G7D	3'	1,450	12W	5000K	80+	Frosted	Glass	210°	50K	5	
09288	LED15WT8F/48/835K-G7D	4'	1,700	15W	3500K	80+	Frosted	Glass	210°	50K	5	✓
09278	LED15WT8F/48/840K-G7D	4'	1,800	15W	4000K	80+	Frosted	Glass	210°	50K	5	✓
09279	LED15WT8F/48/850K-G7D	4'	1,800	15W	5000K	80+	Frosted	Glass	210°	50K	5	✓
09396	LED18WT8F/48/835K-G7D	4'	2,100	18W	3500K	80+	Frosted	Glass	210°	50K	5	✓
09397	LED18WT8F/48/840K-G7D	4'	2,200	18W	4000K	80+	Frosted	Glass	210°	50K	5	✓
09398	LED18WT8F/48/850K-G7D	4'	2,200	18W	5000K	80+	Frosted	Glass	210°	50K	5	✓

✓ DesignLights Consortium® Qualified

## T8 LED Direct Fit : Electronic Ballast Compatible Tubes : DLC v4.0

Order Code	Item	Length	Lm	Nominal W	V (Ballast Dependent)	CCT	CRI	Glass Tube	Bm	Life/Hrs	Photo #	DLC v4.0
60440	LED8WT8/24/835-G7DR	2'	1,200	8W	120-277V, 347V	3500K	80+	Frosted	220°	50K	2	✓
60441	LED8WT8/24/840-G7DR	2'	1,250	8W	120-277V, 347V	4000K	80+	Frosted	220°	50K	2	✓
60442	LED8WT8/24/850-G7DR	2'	1,250	8W	120-277V, 347V	5000K	80+	Frosted	220°	50K	2	✓
60443	LED11.5WT8/48/835-G7DR	4'	1,700	11.5W	120-277V, 347V	3500K	80+	Frosted	220°	50K	2	✓
60444	LED11.5WT8/48/840-G7DR	4'	1,800	11.5W	120-277V, 347V	4000K	80+	Frosted	220°	50K	2	✓
60445	LED11.5WT8/48/850-G7DR	4'	1,800	11.5W	120-277V, 347V	5000K	80+	Frosted	220°	50K	2	✓

Available Q1 2017

✓ DesignLights Consortium® Qualified

## T8 LED Direct Fit U-Bend : Electronic Ballast Compatible

Order Code	Item	Length	Lm	Nominal Lamp W	System W	V (Ballast Dependent)	CCT	CRI	Glass Tube	Bm	Life/Hrs	Photo #
09113	LED18T8F/U6/835-G5DR	2' U-Bend 6"	1,700	12W	15W	120-277V, 347V	3500K	80+	Frosted	220°	50K	6
09114	LED18T8F/U6/840-G5DR	2' U-Bend 6"	1,800	12W	15W	120-277V, 347V	4000K	80+	Frosted	220°	50K	6
09116	LED18T8F/U6/850-G5DR	2' U-Bend 6"	1,800	12W	15W	120-277V, 347V	5000K	80+	Frosted	220°	50K	6
60458	LED12WT8/U1/835-G7DR	2' U-Bend 1-5/8"	1,700	12W	15W	120-277V, 347V	3500K	80+	Frosted	210°	50K	7
60459	LED12WT8/U1/840-G7DR	2' U-Bend 1-5/8"	1,800	12W	15W	120-277V, 347V	4000K	80+	Frosted	210°	50K	7
60460	LED12WT8/U1/850-G7DR	2' U-Bend 1-5/8"	1,800	12W	15W	120-277V, 347V	5000K	80+	Frosted	210°	50K	7

## T8 LED Line Voltage U-Bend : Bypass

Order Code	Item	Length	Lm	W	CCT	CRI	Appearance	Life/Hrs	Photo #
08585	LEDP-18T8FU6/41K	2'	1,800	18	4100K	80+	Frosted	50K	8
08587	LEDP-18T8FU6/50K	2'	1,800	18	5000K	80+	Frosted	50K	8




## PLL Replacement Lamps

- Solid state replacement for 2' 40W PLL compact fluorescent lamps with 2G11 base
- Frosted lens for uniform diffuse appearance
- Ultra-high performance LEDs deliver 100 lpw
- Lifetime exceeds 50,000 hrs
- Up to 50% instant energy savings
- Choice of 3000K, 3500K, 4000K, and 5000K CCT
- Instant-on with no warm up like fluorescents

### PLL Replacement : Direct Fit : Electronic Ballast Compatible : 2G11

Order Code	Item	Length	Lm	W	CCT	CRI	V	Bm	Life/Hrs L70	Base	Photo #
60461	LED23W/PLL/830-G7DR	22"	2,600	23W	3000K	80+	120-277V, 347V	120°	50K	2G11	1
60462	LED23W/PLL/835-G7DR	22"	2,600	23W	3500K	80+	120-277V, 347V	120°	50K	2G11	1
60463	LED23W/PLL/840-G7DR	22"	2,800	23W	4000K	80+	120-277V, 347V	120°	50K	2G11	1
60464	LED23W/PLL/850-G7DR	22"	2,800	23W	5000K	80+	120-277V, 347V	120°	50K	2G11	1





## Filament Dimmable Decorative Lamps

- LED lamp with the same vintage look and feel as nostalgic incandescent filament lamps
- 80% more efficient and 20x longer life than incandescent
- 320° omni-directional light source adds warm ambient glow to room décor
- 2200K amber and 2700K clear available in decorative shapes
- Compatible with a wide array of leading edge TRIAC dimmers
- Suitable for use in damp locations
- Suitable for use in totally enclosed fixtures
- Contains no lead or mercury; RoHS compliant
- 3 year limited warranty

Order Code	Item	Lm	W	CCT	CRI	Color	MOL	Life/Hrs	Base	Replaces Incandescent	Photo #
09308	LED5WA19/FIL/822K-DIM-G6	400	5W	2200K	80+	Amber	4.25"	15K	E26	40W A19 Amber	1
09314	LED5WG40/FIL/822K-DIM-G6	400	5W	2200K	80+	Amber	6.69"	15K	E26	40W G40 Amber	2
09315	LED5WST19/FIL/822K-DIM-G6	400	5W	2200K	80+	Amber	5.04"	15K	E26	40W ST19 Amber	3
09441	LED7WA19/FIL/SB/827K-DIM-G7	800	7W	2700K	80+	Silver Bowl	4.25"	15K	E26	60W A19 Silver Bowl	5
09309	LED7WA19/FIL/827K-DIM-G6	800	7W	2700K	80+	Clear	4.25"	15K	E26	60W A19	4
09310	LED4WB11E12/FIL/827K-DIM-G6	400	4W	2700K	80+	Clear	3.86"	15K	E12	40W B11	6
09311	LED5WB11E26/FIL/827K-DIM-G6	450	5W	2700K	80+	Clear	3.71"	15K	E26	40W B11	7
09312	LED4WBA11E12/FIL/827K-DIM-G6	400	4W	2700K	80+	Clear	4.72"	15K	E12	40W BA11	8
09313	LED6WG25/FIL/827K-DIM-G6	400	5.5W	2700K	80+	Clear	4.41"	15K	E26	40W G25	9



**3 YEAR WARRANTY**

**UL US LISTED**



## Decorative Replacement Lamps

- Direct replacement for incandescent globe and bullet lamps
- 15,000 hour rated life
- 50,000 hour design life
- Ideal for wall sconces and ceiling fans
- Available in 2700K, 3000K and 4000K CCT
- Lasts 10x longer than incandescent
- Instant-on with no warm up, unlike CFLs
- Not for use in enclosed fixtures

### G25 Decorative : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
90038	LED6WG25/827K-DIM-G4	450	6W	2700K	80+	15K	50W G25	1	★
90037	LED6WG25/830K-DIM-G4	450	6W	3000K	80+	15K	50W G25	1	★
90036	LED6WG25/840K-DIM-G4	450	6W	4000K	80+	15K	50W G25	1	★

★ ENERGY STAR® Approved

### B11 Decorative : Dimmable : Candelabra Base

Order Code	Item	Lm	W	CCT	CRI	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
08729	LED5WB11/E12/827-DIM-G5	325	5W	2700K	80+	15K	40W B11	2	★
08730	LED5WB11/E12/830-DIM-G5	325	5W	3000K	80+	15K	40W B11	2	★

★ ENERGY STAR® Approved

### B11 Decorative : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
08731	LED5WB11/E26/827-DIM-G5	325	5W	2700K	80+	15K	40W B11	3	★
08732	LED5WB11/E26/830-DIM-G5	325	5W	3000K	80+	15K	40W B11	3	★

★ ENERGY STAR® Approved



**5 YEAR WARRANTY**





## A19/A21 Replacement Lamps

- Direct replacement for incandescent A lamps
- 300° omni beam angle is ideal for table lamps, wall sconces, and luminous globe fixtures
- 80% more efficient and 30x longer life than incandescent
- Compatible with a wide array of dimmers
- Instant-on with no warm up, unlike CFLs
- Available in 2700K, 3000K, and 4000K CCT
- Shatter-resistant for reduced risk of injury and breakage

### A19/A21 : Omnidirectional : Dimmable : Medium Base (Sold in 2-Packs)

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
60421	LED6WA19/OMN/827K-DIM-G7 2PK	470	6W	2700K	80+	Omni	15K	40W A19	1	★
60422	LED6WA19/OMN/830K-DIM-G7 2PK	470	6W	3000K	80+	Omni	15K	40W A19	1	★
60423	LED6WA19/OMN/840K-DIM-G7 2PK	470	6W	4000K	80+	Omni	15K	40W A19	1	★
60424	LED9WA19/OMN/827K-DIM-G7 2PK	800	9W	2700K	80+	Omni	15K	60W A19	1	★
60425	LED9WA19/OMN/830K-DIM-G7 2PK	800	9W	3000K	80+	Omni	15K	60W A19	1	★
60426	LED9WA19/OMN/840K-DIM-G7 2PK	800	9W	4000K	80+	Omni	15K	60W A19	1	★
60427	LED9WA19/OMN/827K-DEC-G7 2PK*	800	9W	2700K	80+	Omni	15K	60W A19	1	★
60428	LED9WA19/OMN/830K-DEC-G7 2PK*	800	9W	3000K	80+	Omni	15K	60W A19	1	★
60429	LED9WA19/OMN/840K-DEC-G7 2PK*	800	9W	4000K	80+	Omni	15K	60W A19	1	★
60430	LED11WA19/OMN/827K-DIM-G7 2PK	1,100	11W	2700K	80+	Omni	15K	75W A19	1	★
60431	LED11WA19/OMN/830K-DIM-G7 2PK	1,100	11W	3000K	80+	Omni	15K	75W A19	1	★
60432	LED11WA19/OMN/840K-DIM-G7 2PK	1,100	11W	4000K	80+	Omni	15K	75W A19	1	★
60433	LED15WA21/OMN/827K-DIM-G7 2PK	1,600	15W	2700K	80+	Omni	15K	100W A21	2	★
60434	LED15WA21/OMN/830K-DIM-G7 2PK	1,600	15W	3000K	80+	Omni	15K	100W A21	2	★
60435	LED15WA21/OMN/840K-DIM-G7 2PK	1,600	15W	4000K	80+	Omni	15K	100W A21	2	★
60436	LED15WA21/OMN/850K-DIM-G7 2PK	1,600	15W	5000K	80+	Omni	15K	100W A21	2	★
09413	LED15WA21/3WAY/827K-DIM-G7 2PK**	1,600	15W	2700K	80+	Omni	15K	100W A21	2	★

\*Enclosed Fixture Rated

\*\*3-Way 470/800/1600lm

★ ENERGY STAR® Approved



5 YEAR WARRANTY



## A19/A21 : Omnidirectional : Dimmable : GU24 Base (Sold in 2-Packs)

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09442	LED9WA19/OMN/827GU24DIMG7 2PK	800	9W	2700K	80+	Omni	15K	60W A19	3	★
09443	LED9WA19/OMN/830GU24DIMG7 2PK	800	9W	3000K	80+	Omni	15K	60W A19	3	★
09444	LED9WA19/OMN/840GU24DIMG7 2PK	800	9W	4000K	80+	Omni	15K	60W A19	3	★
09445	LED11WA19/OMN/827GU24DIMG7 2PK	1,100	11W	2700K	80+	Omni	15K	75W A19	3	★
09446	LED11WA19/OMN/830GU24DIMG7 2PK	1,100	11W	3000K	80+	Omni	15K	75W A19	3	★
09447	LED11WA19/OMN/840GU24DIMG7 2PK	1,100	11W	4000K	80+	Omni	15K	75W A19	3	★
09453	LED15WA21/OMN/827GU24DIMG7 2PK	1,600	15W	2700K	80+	Omni	15K	100W A21	4	★
09454	LED15WA21/OMN/830GU24DIMG7 2PK	1,600	15W	3000K	80+	Omni	15K	100W A21	4	★
09455	LED15WA21/OMN/840GU24DIMG7 2PK	1,600	15W	4000K	80+	Omni	15K	100W A21	4	★

★ ENERGY STAR® Approved


## A19/A21 : 240° : Dimmable : Advantage™ : Medium Base (Sold in 2-Packs)

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #
09458	LED6WA19/ADV/827-DIM-G7 2PK	440	6W	2700K	80+	240°	10K	40W A19	5
09459	LED6WA19/ADV/830-DIM-G7 2PK	440	6W	3000K	80+	240°	10K	40W A19	5
09460	LED6WA19/ADV/840-DIM-G7 2PK	440	6W	4000K	80+	240°	10K	40W A19	5
09461	LED6WA19/ADV/850-DIM-G7 2PK	440	6W	5000K	80+	240°	10K	40W A19	5
60401	LED9WA19/ADV/827K-DIM-G7 2PK	750	9W	2700K	80+	240°	10K	60W A19	5
60402	LED9WA19/ADV/830K-DIM-G7 2PK	750	9W	3000K	80+	240°	10K	60W A19	5
60403	LED9WA19/ADV/840K-DIM-G7 2PK	750	9W	4000K	80+	240°	10K	60W A19	5
60404	LED9WA19/ADV/850K-DIM-G7 2PK	750	9W	5000K	80+	240°	10K	60W A19	5
60405	LED12WA19/ADV/827K-DIM-G7 2PK	1,050	12W	2700K	80+	240°	10K	75W A19	5
60406	LED12WA19/ADV/830K-DIM-G7 2PK	1,050	12W	3000K	80+	240°	10K	75W A19	5
60407	LED12WA19/ADV/840K-DIM-G7 2PK	1,050	12W	4000K	80+	240°	10K	75W A19	5
60408	LED12WA19/ADV/850K-DIM-G7 2PK	1,050	12W	5000K	80+	240°	10K	75W A19	5
60409	LED16WA21/ADV/827K-DIM-G7 2PK	1,550	16W	2700K	80+	240°	10K	100W A21	5
60410	LED16WA21/ADV/830K-DIM-G7 2PK	1,550	16W	3000K	80+	240°	10K	100W A21	5
60411	LED16WA21/ADV/840K-DIM-G7 2PK	1,550	16W	4000K	80+	240°	10K	100W A21	5
60412	LED16WA21/ADV/850K-DIM-G7 2PK	1,550	16W	5000K	80+	240°	10K	100W A21	5

## A19/A21 : 240° : Non-Dimmable : Advantage™ : Medium Base (Sold in 2-Packs)

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #
09462	LED6WA19/ADV/827-G7 2PK	440	6W	2700K	80+	240°	10K	40W A19	5
09463	LED6WA19/ADV/830-G7 2PK	440	6W	3000K	80+	240°	10K	40W A19	5
09464	LED6WA19/ADV/840-G7 2PK	440	6W	4000K	80+	240°	10K	40W A19	5
09293	LED9WA19/240/827K-G6A 2PK	760	9W	2700K	80+	240°	10K	60W A19	5
09294	LED9WA19/240/830K-G6A 2PK	760	9W	3000K	80+	240°	10K	60W A19	5
09295	LED9WA19/240/840K-G6A 2PK	760	9W	4000K	80+	240°	10K	60W A19	5
60413	LED12WA19/ADV/827K-G7 2PK	1,050	12W	2700K	80+	240°	10K	75W A19	5
60414	LED12WA19/ADV/830K-G7 2PK	1,050	12W	3000K	80+	240°	10K	75W A19	5
60415	LED12WA19/ADV/840K-G7 2PK	1,050	12W	4000K	80+	240°	10K	75W A19	5

Continued on next page >>>



# LED Replacement Lamps

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #
60416	LED12WA19/ADV/850K-G7 2PK	1,050	12W	5000K	80+	240°	10K	75W A19	5
60417	LED16WA21/ADV/827K-G7 2PK	1,550	16W	2700K	80+	240°	10K	100W A21	5
60418	LED16WA21/ADV/830K-G7 2PK	1,550	16W	3000K	80+	240°	10K	100W A21	5
60419	LED16WA21/ADV/840K-G7 2PK	1,550	16W	4000K	80+	240°	10K	100W A21	5
60420	LED16WA21/ADV/850K-G7 2PK	1,550	16W	5000K	80+	240°	10K	100W A21	5

## A19/A21 : 300° Omnidirectional : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v1.2
09132	LED6WA19/300/827K-DIM-G6	470	6W	2700K	80+	300°	25K	40W A19	1	★
09122	LED6WA19/300/830K-DIM-G6	470	6W	3000K	80+	300°	25K	40W A19	1	★
09133	LED6WA19/300/840K-DIM-G6	470	6W	4000K	80+	300°	25K	40W A19	1	★
09134	LED9WA19/300/827K-DIM-G6	800	9W	2700K	80+	300°	25K	60W A19	1	★
09135	LED9WA19/300/830K-DIM-G6	800	9W	3000K	80+	300°	25K	60W A19	1	★
09136	LED9WA19/300/840K-DIM-G6	800	9W	4000K	80+	300°	25K	60W A19	1	★
08914	LED11WA19/300/827K-DIM-G5	1,100	11W	2700K	80+	300°	25K	75W A19	1	★
08915	LED11WA19/300/830K-DIM-G5	1,100	11W	3000K	80+	300°	25K	75W A19	1	★
08916	LED11WA19/300/840K-DIM-G5	1,100	11W	4000K	80+	300°	25K	75W A19	1	★
08920	LED15WA21/300/827K-DIM-G5	1,600	15W	2700K	80+	300°	25K	100W A21	2	★
08921	LED15WA21/300/830K-DIM-G5	1,600	15W	3000K	80+	300°	25K	100W A21	2	★
08922	LED15WA21/300/840K-DIM-G5	1,600	15W	4000K	80+	300°	25K	100W A21	2	★
09112	LED15WA21/300/850K-DIM-G5	1,600	15W	5000K	80+	300°	25K	100W A21	2	★
09107	LED15WA21/3WAY/827K-G5*	1,600	15W	2700K	80+	300°	25K	100W A21	2	★
09109	LED9WA19/300/830K-DEC-G5**	800	9W	3000K	80+	300°	25K	60W A19	1	★
09110	LED9WA19/300/840K-DEC-G5**	800	9W	4000K	80+	300°	25K	60W A19	1	★

While supplies last. \*3-Way 470/800/1600lm \*\*Enclosed Fixture Rated

★ ENERGY STAR® Approved thru January 2, 2017

## A19/A21 : 300° Omnidirectional : Dimmable : GU24 Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v1.2
08923	LED9WA19/300/827K-GU24-DIM-G5	800	9W	2700K	80+	300°	25K	60W A19	1	★
08924	LED9WA19/300/830K-GU24-DIM-G5	800	9W	3000K	80+	300°	25K	60W A19	1	★
08925	LED9WA19/300/840K-GU24-DIM-G5	800	9W	4000K	80+	300°	25K	60W A19	1	★
08926	LED11WA19/300/827K-GU24-DIM-G5	1,100	11W	2700K	80+	300°	25K	75W A19	1	★
08927	LED11WA19/300/830K-GU24-DIM-G5	1,100	11W	3000K	80+	300°	25K	75W A19	1	★
08928	LED11WA19/300/840K-GU24-DIM-G5	1,100	11W	4000K	80+	300°	25K	75W A19	1	★
08929	LED15WA21/300/827K-GU24-DIM-G5	1,600	15W	2700K	80+	300°	25K	100W A21	2	★
08930	LED15WA21/300/830K-GU24-DIM-G5	1,600	15W	3000K	80+	300°	25K	100W A21	2	★
08931	LED15WA21/300/840K-GU24-DIM-G5	1,600	15W	4000K	80+	300°	25K	100W A21	2	★

While supplies last.

★ ENERGY STAR® Approved thru January 2, 2017

## A19/A21 : 240° : Dimmable : Advantage™ : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #
09143	LED6WA19/240/827K-DIM-G6A	440	6W	2700K	80+	240°	25K	40W A19	5
09144	LED6WA19/240/830K-DIM-G6A	440	6W	3000K	80+	240°	25K	40W A19	5
09145	LED6WA19/240/840K-DIM-G6A	440	6W	4000K	80+	240°	25K	40W A19	5
09146	LED6WA19/240/850K-DIM-G6A	440	6W	5000K	80+	240°	25K	40W A19	5

Continued on next page >>>

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #
<b>09147</b>	LED9WA19/240/827K-DIM-G6A	760	9W	2700K	80+	240°	25K	60W A19	5
<b>09296</b>	LED9WA19/240/827K-DIM-G6A 2PK	760	9W	2700K	80+	240°	25K	60W A19	5
<b>09119</b>	LED9WA19/240/830K-DIM-G6A	760	9W	3000K	80+	240°	25K	60W A19	5
<b>09297</b>	LED9WA19/240/830K-DIM-G6A 2PK	760	9W	3000K	80+	240°	25K	60W A19	5
<b>09120</b>	LED9WA19/240/840K-DIM-G6A	760	9W	4000K	80+	240°	25K	60W A19	5
<b>09298</b>	LED9WA19/240/840K-DIM-G6A 2PK	760	9W	4000K	80+	240°	25K	60W A19	5
<b>09123</b>	LED9WA19/240/850K-DIM-G6A	760	9W	5000K	80+	240°	25K	60W A19	5

While supplies last.

### A19/A21 : 240° : Dimmable : Advantage™ : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #
<b>09140</b>	LED6WA19/240/827K-G6A	420	6W	2700K	80+	240°	25K	40W A19	5
<b>09141</b>	LED6WA19/240/830K-G6A	420	6W	3000K	80+	240°	25K	40W A19	5
<b>09142</b>	LED6WA19/240/840K-G6A	420	6W	4000K	80+	240°	25K	40W A19	5
<b>09139</b>	LED9WA19/240/827K-G6A	750	9W	2700K	80+	240°	25K	60W A19	5
<b>09138</b>	LED9WA19/240/830K-G6A	750	9W	3000K	80+	240°	25K	60W A19	5
<b>09121</b>	LED9WA19/240/840K-G6A	750	9W	4000K	80+	240°	25K	60W A19	5

While supplies last.





## BR Replacement Lamps

- Direct replacement for incandescent BR lamps
- 80% more efficient and 20X longer life than incandescent
- Smooth aluminum body with ANSI standard form factor
- Instant-on with no warm up, unlike CFLs
- +25,000 hour rated life for ENERGY STAR® Approved lamps
- 50,000 hour design life
- Choice of 2700K, 3000K, 4000K, or 5000K CCT
- Acceptable for ICAT rated downlights

### BR20 : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
08932	LED7WBR20/827K-DIM-G5	550	7W	2700K	80+	120°	25K	50W BR20	1	★
08933	LED7WBR20/830K-DIM-G5	550	7W	3000K	80+	120°	25K	50W BR20	1	★
08935	LED7WBR20/840K-DIM-G5	550	7W	4000K	80+	120°	25K	50W BR20	1	★

★ ENERGY STAR® Approved

### BR30 : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
08998	LED8WBR30/827K-DIM-G5	650	8W	2700K	80+	120°	25K	65W BR30	2	★
08999	LED8WBR30/830K-DIM-G5	650	8W	3000K	80+	120°	25K	65W BR30	2	★
09000	LED8WBR30/840K-DIM-G5	650	8W	4000K	80+	120°	25K	65W BR30	2	★
08936	LED11WBR30/827K-DIM-G5	850	11W	2700K	80+	120°	25K	65W BR30	2	★
08937	LED11WBR30/830K-DIM-G5	850	11W	3000K	80+	120°	25K	65W BR30	2	★
08938	LED11WBR30/840K-DIM-G5	850	11W	4000K	80+	120°	25K	65W BR30	2	★
09111	LED11WBR30/850K-DIM-G5	850	11W	5000K	80+	120°	25K	65W BR30	2	Pending

★ ENERGY STAR® Approved



## BR30 : Dimmable : Medium Base : 90 CRI

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09351	LED11WBR30/927K-DIM-G6	800	11W	2700K	90+	120°	25K	65W BR30	2	★
09352	LED11WBR30/930K-DIM-G6	800	11W	3000K	90+	120°	25K	65W BR30	2	★

★ ENERGY STAR® Approved

## BR30 : Dimmable : Medium Base : Pink

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09092	LED11WBR30/PINK-DIM-G5	N/A	11W	N/A	N/A	120°	25K	65W BR30 Pink	3	

## BR40 : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
08942	LED17WBR40/827K-DIM-G5	1,400	17W	2700K	80+	120°	25K	100W BR40	5	★
08943	LED17WBR40/830K-DIM-G5	1,400	17W	3000K	80+	120°	25K	100W BR40	5	★
08944	LED17WBR40/840K-DIM-G5	1,400	17W	4000K	80+	120°	25K	100W BR40	5	★

★ ENERGY STAR® Approved

## BR40 : Dimmable : Medium Base : 90 CRI

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09353	LED13WBR40/927K-DIM-G5	1,000	13W	2700K	80+	120°	25K	80W BR40	5	★
09354	LED13WBR40/930K-DIM-G5	1,000	13W	3000K	80+	120°	25K	80W BR40	5	★

★ ENERGY STAR® Approved



5 YEAR WARRANTY





## PAR Replacement Lamps

- Direct replacement for halogen PARs
- Compatible with a wide array of dimmers
- +25,000 hour rated life for ENERGY STAR® Approved lamps
- 50,000 hour design life
- Up to 80% electricity savings vs. halogen
- Choice of 2700K, 3000K and 4000K CCT
- Environmentally friendly: contains no glass, mercury, or lead

### PAR16 : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09041	LED7WPAR16/FL/827K-DIM-G5	490	7W	2700K	80+	40°	25K	50W PAR16	1	★
09042	LED7WPAR16/FL/830K-DIM-G5	490	7W	3000K	80+	40°	25K	50W PAR16	1	★
09043	LED7WPAR16/FL/840K-DIM-G5	490	7W	4000K	80+	40°	25K	50W PAR16	1	★
09038	LED7WPAR16/NFL/827K-DIM-G5	490	7W	2700K	80+	20°	25K	50W PAR16	1	★
09039	LED7WPAR16/NFL/830K-DIM-G5	490	7W	3000K	80+	20°	25K	50W PAR16	1	★
09040	LED7WPAR16/NFL/840K-DIM-G5	490	7W	4000K	80+	20°	25K	50W PAR16	1	★

★ ENERGY STAR® Approved

### PAR20 : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09184	LED7WPAR20/FL/827K-DIM-G6	470	7W	2700K	80+	40°	25K	50W PAR20	2	★
09185	LED7WPAR20/FL/830K-DIM-G6	470	7W	3000K	80+	40°	25K	50W PAR20	2	★
09186	LED7WPAR20/FL/840K-DIM-G6	470	7W	4000K	80+	40°	25K	50W PAR20	2	★
09187	LED7WPAR20/NFL/827K-DIM-G6	470	7W	2700K	80+	20°	25K	50W PAR20	2	★
09188	LED7WPAR20/NFL/830K-DIM-G6	470	7W	3000K	80+	20°	25K	50W PAR20	2	★
09189	LED7WPAR20/NFL/840K-DIM-G6	470	7W	4000K	80+	20°	25K	50W PAR20	2	★

★ ENERGY STAR® Approved



**5 YEAR WARRANTY**



## PAR30 : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09155	LED11WPAR30/FL/827K-DIM-G6	850	11W	2700K	80+	40°	25K	75W PAR30	3	★
09156	LED11WPAR30/FL/830K-DIM-G6	850	11W	3000K	80+	40°	25K	75W PAR30	3	★
09157	LED11WPAR30/FL/840K-DIM-G6	850	11W	4000K	80+	40°	25K	75W PAR30	3	★
09325	LED11WPAR30/FL/850K-DIM-G6	850	11W	5000K	80+	40°	25K	75W PAR30	3	★
09158	LED11WPAR30/NFL/827K-DIM-G6	850	11W	2700K	80+	20°	25K	75W PAR30	3	★
09159	LED11WPAR30/NFL/830K-DIM-G6	850	11W	3000K	80+	20°	25K	75W PAR30	3	★
09160	LED11WPAR30/NFL/840K-DIM-G6	850	11W	4000K	80+	20°	25K	75W PAR30	3	★

★ ENERGY STAR® Approved

## PAR30SN : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v1.2	ENERGY STAR v2.0
08553	LED12WPAR30S/FL/827-DIM-G4A*	800	12W	2700K	80+	40°	25K	75W PAR30SN	4	★	
08554	LED12WPAR30S/FL/830-DIM-G4A*	800	12W	3000K	80+	40°	25K	75W PAR30SN	4	★	
08555	LED12WPAR30S/FL/840-DIM-G4A*	800	12W	4000K	80+	40°	25K	75W PAR30SN	4		
08556	LED12WPAR30S/NFL/827-DIM-G4A*	800	12W	2700K	80+	20°	25K	75W PAR30SN	4	★	
08557	LED12WPAR30S/NFL/830-DIM-G4A*	800	12W	3000K	80+	20°	25K	75W PAR30SN	4	★	
08558	LED12WPAR30S/NFL/840-DIM-G4A*	800	12W	4000K	80+	20°	25K	75W PAR30SN	4		
09476	LED12WPAR30S/FL/827-DIM-G7	950	12W	2700K	80+	40°	25K	75W PAR30SN	4		★
09477	LED12WPAR30S/FL/830-DIM-G7	950	12W	3000K	80+	40°	25K	75W PAR30SN	4		★
09478	LED12WPAR30S/FL/840-DIM-G7	950	12W	4000K	80+	40°	25K	75W PAR30SN	4		★
09479	LED12WPAR30S/NFL/827-DIM-G7	950	12W	2700K	80+	40°	25K	75W PAR30SN	4		★
09480	LED12WPAR30S/NFL/830-DIM-G7	950	12W	3000K	80+	40°	25K	75W PAR30SN	4		★
09481	LED12WPAR30S/NFL/840-DIM-G7	950	12W	4000K	80+	40°	25K	75W PAR30SN	4		★

\*While supplies last.

★ ENERGY STAR® Approved (v1.2 thru January 2, 2017)


## PAR38 : Dimmable : Medium Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v1.2	ENERGY STAR v2.0
09161	LED13WPAR38/FL/827K-DIM-G6	1,050	13W	2700K	80+	40°	25K	100W PAR38	5		★
09162	LED13WPAR38/FL/830K-DIM-G6	1,050	13W	3000K	80+	40°	25K	100W PAR38	5		★
09163	LED13WPAR38/FL/840K-DIM-G6	1,050	13W	4000K	80+	40°	25K	100W PAR38	5		★
90058	LED14WPAR38/NFL/827K-DIM-G4A*	950	14W	2700K	80+	20°	25K	100W PAR38	5	★	
90057	LED14WPAR38/NFL/830K-DIM-G4A*	950	14W	3000K	80+	20°	25K	100W PAR38	5	★	
90056	LED14WPAR38/NFL/840K-DIM-G4A*	950	14W	4000K	80+	20°	25K	100W PAR38	5	★	
90044	LED17WPAR38/FL/827K-DIM-G4A*	1,300	17W	2700K	80+	40°	25K	150W PAR38	5	★	
90043	LED17WPAR38/FL/830K-DIM-G4A*	1,300	17W	3000K	80+	40°	25K	150W PAR38	5	★	
90042	LED17WPAR38/FL/840K-DIM-G4A*	1,300	17W	4000K	80+	40°	25K	150W PAR38	5	★	
09326	LED17WPAR38/FL/850K-DIM-G4A*	1,300	17W	5000K	80+	40°	25K	150W PAR38	5	★	
90041	LED17WPAR38/NFL/827K-DIM-G4A*	1,300	17W	2700K	80+	20°	25K	150W PAR38	5	★	
90040	LED17WPAR38/NFL/830K-DIM-G4A*	1,300	17W	3000K	80+	20°	25K	150W PAR38	5	★	
90039	LED17WPAR38/NFL/840K-DIM-G4A*	1,300	17W	4000K	80+	20°	25K	150W PAR38	5		
09170	LED20WPAR38/FL/827K-DIM-G6	1,700	20W	2700K	80+	45°	25K	150W PAR38	6		★
09171	LED20WPAR38/FL/830K-DIM-G6	1,700	20W	3000K	80+	45°	25K	150W PAR38	6		★
09172	LED20WPAR38/FL/840K-DIM-G6	1,700	20W	4000K	80+	45°	25K	150W PAR38	6		★

\*While supplies last.

★ ENERGY STAR® Approved (v1.2 thru January 2, 2017)



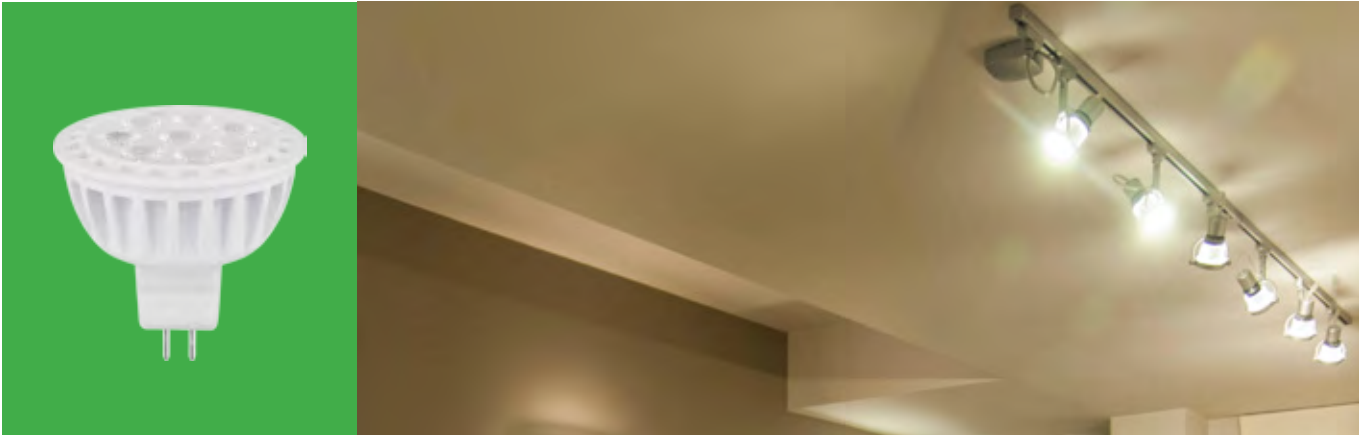

## Miniature Reflector Replacement Lamps

- Direct replacement for halogen miniature reflector lamps
- 25,000 hour rated life lasting 20x longer than halogen incandescent
- Choice of 2700K, 3000K and 4000K CCT
- Available in 2 beam distributions: 25° Narrow Flood & 40° Flood
- Shatter-resistant for reduced risk of injury or breakage
- Contains no lead or mercury; RoHS compliant

### MR16 : Non-Dimmable : GU5.3 Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Halogen	Photo #
<b>08831</b>	LED7WMR16/20/827-G5	380	7W	2700K	80+	20°	25K	50W MR16	2
<b>08834</b>	LED7WMR16/20/830-G5	400	7W	3000K	80+	20°	25K	50W MR16	2
<b>08836</b>	LED7WMR16/20/840-G5	400	7W	4000K	80+	20°	25K	50W MR16	2
<b>08832</b>	LED7WMR16/40/827-G5	380	7W	2700K	80+	40°	25K	42W MR16	2
<b>08835</b>	LED7WMR16/40/830-G5	400	7W	3000K	80+	40°	25K	42W MR16	2
<b>08837</b>	LED7WMR16/40/840-G5	400	7W	4000K	80+	40°	25K	42W MR16	2

While supplies last.

### MR16 : Dimmable : GU5.3 Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Halogen	Photo #	ENERGY STAR v1.2	ENERGY STAR v2.0
<b>09429</b>	LED7WMR16/20/827-DIM-G7**	490	7W	2700K	80+	20°	25K	50W MR16	3	★	★
<b>09430</b>	LED7WMR16/20/830-DIM-G7**	490	7W	3000K	80+	20°	25K	50W MR16	3	★	★
<b>09431</b>	LED7WMR16/20/840-DIM-G7**	490	7W	4000K	80+	20°	25K	50W MR16	3	★	★
<b>09432</b>	LED7WMR16/40/827-DIM-G7**	490	7W	2700K	80+	40°	25K	50W MR16	3	★	★
<b>09433</b>	LED7WMR16/40/830-DIM-G7**	490	7W	3000K	80+	40°	25K	50W MR16	3	★	★
<b>09434</b>	LED7WMR16/40/840-DIM-G7**	490	7W	4000K	80+	40°	25K	50W MR16	3	★	★

Continued on next page >>>



**5 YEAR WARRANTY**



Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Halogen	Photo #	ENERGY STAR v1.2	ENERGY STAR v2.0
<b>09201</b>	LED7WMR16/FL/827K-DIM-G6*	500	7W	2700K	80+	40°	25K	50W MR16	3		
<b>09202</b>	LED7WMR16/FL/830K-DIM-G6*	520	7W	3000K	80+	40°	25K	50W MR16	3	★	
<b>09203</b>	LED7WMR16/FL/840K-DIM-G6*	540	7W	4000K	80+	40°	25K	50W MR16	3		
<b>09204</b>	LED7WMR16/NFL/827K-DIM-G6*	500	7W	2700K	80+	25°	25K	50W MR16	3		
<b>09205</b>	LED7WMR16/NFL/830K-DIM-G6*	520	7W	3000K	80+	25°	25K	50W MR16	3	★	
<b>09206</b>	LED7WMR16/NFL/840K-DIM-G6*	540	7W	4000K	80+	25°	25K	50W MR16	3		

\*\*Available Q1, 2017 \*While supplies last.

★ ENERGY STAR® Approved (v1.2 thru January 2, 2017)

## MR16 : Dimmable : GU10 Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Halogen	Photo #	ENERGY STAR v1.2	ENERGY STAR v2.0
<b>09435</b>	LED7WGU10/20/827-DIM-G7**	500	7W	2700K	80+	20°	25K	75W GU10	4		★
<b>09436</b>	LED7WGU10/20/830-DIM-G7**	500	7W	3000K	80+	20°	25K	75W GU10	4		★
<b>09437</b>	LED7WGU10/20/840-DIM-G7**	500	7W	4000K	80+	20°	25K	75W GU10	4		★
<b>09438</b>	LED7WGU10/40/827-DIM-G7**	500	7W	2700K	80+	40°	25K	50W GU10	4		★
<b>09439</b>	LED7WGU10/40/830-DIM-G7**	500	7W	3000K	80+	40°	25K	50W GU10	4		★
<b>09440</b>	LED7WGU10/40/840-DIM-G7**	500	7W	4000K	80+	40°	25K	50W GU10	4		★
<b>08838</b>	LED7WGU10/20/827-DIM-G4*	420	7W	2700K	80+	20°	25K	75W GU10	4		
<b>90028</b>	LED7WGU10/20/830-DIM-G4*	450	7W	3000K	80+	20°	25K	75W GU10	4	★	
<b>08840</b>	LED7WGU10/20/840-DIM-G4*	450	7W	4000K	80+	20°	25K	75W GU10	4		
<b>08839</b>	LED7WGU10/40/827-DIM-G4*	420	7W	2700K	80+	40°	25K	50W GU10	4		
<b>90027</b>	LED7WGU10/40/830-DIM-G4*	450	7W	3000K	80+	40°	25K	50W GU10	4	★	
<b>08841</b>	LED7WGU10/40/840-DIM-G4*	450	7W	4000K	80+	40°	25K	50W GU10	4		

\*\*Available Q1, 2017 \*While supplies last.


★ ENERGY STAR® Approved (v1.2 thru January 2, 2017)

## MR11 : Non-Dimmable : GU4 Base

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Halogen	Photo #
<b>08893</b>	LED2WMR11/120/830-G5	140	2W	3000K	80+	120°	35K	20W MR11	1
<b>08894</b>	LED4WMR11/120/830-G5	160	4W	3000K	80+	120°	35K	20W MR11	1

## GBF/1383 : Non-Dimmable

Order Code	Item	Lm	W	CCT	CRI	Bm	Life/Hrs L70	Replaces Halogen	Photo #
<b>08895</b>	LED3WGBF/30/830-G5	125	3W	3000K	80+	30°	20K	20W GBF	5
<b>08900</b>	LED3WGBF/30/840-G5	125	3W	4000K	80+	30°	20K	20W GBF	5
<b>08896</b>	LED3W1383/30/830-G5	125	3W	3000K	80+	30°	20K	20W 1383	5
<b>08899</b>	LED3W1383/30/840-G5	125	3W	4000K	80+	30°	20K	20W 1383	5





## G4 & G9 Replacement Lamps

- Direct replacement for halogen incandescent G4 & G9 lamps
- Consumes 75% less energy and lasts 25x longer than incandescent bulbs
- 25,000 hour rated life
- Choice of 3000K, 4000K, and 5000K CCT
- 200° multi-directional beam angle
- Integrated driver

### G4 : 12VAC

Order Code	Item	Lm	W	CCT	CRI	Life/Hrs L70	Replaces Incan.	Photo #
<b>08605</b>	LED2WG4/830K-G4	200	2.5W	3000K	80+	15K	10W G4	1
<b>08606</b>	LED2WG4/840K-G4	200	2.5W	4000K	80+	15K	10W G4	1
<b>08607</b>	LED2WG4/850K-G4	200	2.5W	5000K	80+	15K	10W G4	1

### G9 : 120V

Order Code	Item	Lm	W	CCT	CRI	Life/Hrs L70	Replaces Incan.	Photo #
<b>08608</b>	LED2WG9/830K-G4	200	2.5W	3000K	80+	15K	10W G9	2
<b>08609</b>	LED2WG9/840K-G4	200	2.5W	4000K	80+	15K	10W G9	2
<b>08610</b>	LED2WG9/850K-G4	200	2.5W	5000K	80+	15K	10W G9	2



**5 YEAR WARRANTY**

**UL US LISTED**



## LLW : Linear Wrap

- Cost-effective and energy-efficient 4ft LED utility wrap fixture
- Ideal replacement for less efficient fluorescent wrap fixtures
- Durable steel body construction with white polyester powder coat finish
- Features full length wrap-around U-shaped prismatic acrylic lens
- Universal 0-10V driver for continuous dimming (standard)
- Available in 4000, 4500, and 5100 lumen output
- Environmentally friendly: contains no glass, mercury or lead

Order Code	Item	Size	Lm	W	V	Dimming	CCT	CRI	Life/Hrs L70	Photo #	DLC v4.0 Premium
09425	LLW-3C-40K-U	4'	4,160	32W	120-277V	0-10V Dimming	4000K	80+	50K	1	✓
09426	LLW-4C-40K-U	4'	4,608	36W	120-277V	0-10V Dimming	4000K	80+	50K	1	✓
09427	LLW-5C-40K-U	4'	5,334	42W	120-277V	0-10V Dimming	4000K	80+	50K	1	✓

Available Dec 2016

✓ DesignLights Consortium® Premium Qualified



5 YEAR WARRANTY

UL US LISTED








## SLM : Slim Panel

- 1-for-1 alternative LED solution to traditional fluorescent troffers
- Ultra-slim modern design with smooth uniform light guide lens
- High-efficiency LEDs light the panel evenly
- Edge-lit waveguide lens provides impressive visual comfort with minimal glare
- Available in 2'x2' and 2'x4'
- Extremely shallow depth is ideal for shallow plenum spaces
- Up to 47% energy savings vs traditional fluorescent troffers
- Choice of 3500K, 4000K, or 5000K
- Universal input voltage (100-77V) dimmable power supply (0-10V)

Order Code	Item	Size	Lm	W	CCT	CRI	Life/Hrs L70	V	Dimming	Replaces Fluorescent	Photo #	DLC v4.0
09485	SLM22-3C-35K-U	2'x2'	3,000	30W	3500K	80+	50K	120-277V	0-10V Dimming	3x 17WT8, 2U31T8	1	✓
09486	SLM22-3C-40K-U	2'x2'	3,000	30W	4000K	80+	50K	120-277V	0-10V Dimming	3x 17WT8, 2U31T8	1	✓
09487	SLM22-3C-50K-U	2'x2'	3,000	30W	5000K	80+	50K	120-277V	0-10V Dimming	3x 17WT8, 2U31T8	1	✓
09488	SLM24-5C-35K-U	2'x4'	4,000	40W	3500K	80+	50K	120-277V	0-10V Dimming	2x 32T8, 3x 32T8	2	✓
09489	SLM24-5C-40K-U	2'x4'	4,000	40W	4000K	80+	50K	120-277V	0-10V Dimming	2x 32T8, 3x 32T8	2	✓
09490	SLM24-5C-50K-U	2'x4'	4,000	40W	5000K	80+	50K	120-277V	0-10V Dimming	2x 32T8, 3x 32T8	2	✓

Available Q1 2017

✓ DesignLights Consortium® Standard Qualified





## VOL : Volumetric Troffer

- Provides a pleasant volumetric soft light that fills any interior space
- 125 lpw ultra-high-efficiency delivers superior performance over legacy fluorescent troffers
- Molded center acrylic lens provides optimal glare control
- Standard 0-10V dimming driver
- Choice of 3500K, 4000K, or 5000K
- Available in 2'x2' and 2'x4'

Order Code	Item	Size	Lm	W	CCT	CRI	Life/Hrs L70	V	Dimming	Replaces Fluorescent	Photo #	DLC v4.0 Premium
09469	VOL22-3C-35K-U	2x2	3,198	26W	3500K	80+	50K	120-277V	0-10V Dimming	3x 17WT8, 2U31T8	1	✓
09470	VOL22-3C-40K-U	2x2	3,275	26W	4000K	80+	50K	120-277V	0-10V Dimming	3x 17WT8, 2U31T8	1	✓
09491	VOL22-3C-50K-U	2x2	3,300	26W	5000K	80+	50K	120-277V	0-10V Dimming	3x 17WT8, 2U31T8	1	✓
09471	VOL24-5C-35K-U	2x4	5,880	48W	3500K	80+	50K	120-277V	0-10V Dimming	2x 32T8, 3x 32T8	2	✓
09472	VOL24-5C-40K-U	2x4	5,970	48W	4000K	80+	50K	120-277V	0-10V Dimming	2x 32T8, 3x 32T8	2	✓
09492	VOL24-5C-50K-U	2x4	6,115	48W	5000K	80+	50K	120-277V	0-10V Dimming	2x 32T8, 3x 32T8	2	✓

Available Q1 2017

✓ DesignLights Consortium® Premium Qualified



5 YEAR WARRANTY

UL US LISTED





## Downlight Kit

- Ultra-efficient LED Downlight Kit designed to retrofit into existing incandescent recessed downlights
- Integrated LEDs reduce energy consumption up to 80%
- Fits many popular recessed downlight fixtures
- Lifetime exceeds 35,000 hrs.
- Lasts up to 30X longer than traditional incandescent
- Choice of soft white, warm white and cool white CCT
- Instant-on, no warm-up time

### 4/5/6" Disk Light : Dimmable



Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09087	LED-DKD-13W830-DIM-G5	910	13W	3000K	80+	7.3"	35K	65W BR	1	★
09088	LED-DKD-13W840-DIM-G5	910	13W	4000K	80+	7.3"	35K	65W BR	1	★

★ ENERGY STAR® Approved

### 4" Downlight Kit : Dimmable

Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09365	LED-DK4-10W827-DIM-G5	650	10W	2700K	80+	5.4"	35K	65W BR	2	★
09077	LED-DK4-10W830-DIM-G5	650	10W	3000K	80+	5.4"	35K	65W BR	2	★
09078	LED-DK4-10W840-DIM-G5	650	10W	4000K	80+	5.4"	35K	65W BR	2	★

★ ENERGY STAR® Approved



5 YEAR WARRANTY



**4" Rotatable Eye** : Dimmable : Damp Location

Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09083	LED-DK4RT-11W830-DIM-G5	650	11W	3000K	80+	5.14"	35K	65W BR	3	★
09084	LED-DK4RT-11W840-DIM-G5	650	11W	4000K	80+	5.14"	35K	65W BR	3	★

★ ENERGY STAR® Approved

**6" Downlight Kit** : Dimmable

Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09366	LED-DK6-10W827-DIM-G5	750	10W	2700K	80+	7.5"	35K	65W BR	4	★
09079	LED-DK6-10W830-DIM-G5	750	10W	3000K	80+	7.5"	35K	65W BR	4	★
09080	LED-DK6-10W840-DIM-G5	750	10W	4000K	80+	7.5"	35K	65W BR	4	★
09367	LED-DK6-17W827-DIM-G5	1,200	17W	2700K	80+	7.5"	35K	90W BR	4	★
09081	LED-DK6-17W830-DIM-G5	1,200	17W	3000K	80+	7.5"	35K	90W BR	4	★
09082	LED-DK6-17W840-DIM-G5	1,200	17W	4000K	80+	7.5"	35K	90W BR	4	★

★ ENERGY STAR® Approved

**6" Downlight Kit** : Dimmable : **90 CRI**

Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09327	LED-DK6-15W930-DIM-G5	900	15W	3000K	90+	3.61"	35K	65W BR	4	★
09328	LED-DK6-15W940-DIM-G5	950	15W	4000K	90+	3.61"	35K	65W BR	4	★

★ ENERGY STAR® Approved

**6" Rotatable Eye** : Dimmable : Damp Location



Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Replaces Incan.	Photo #	ENERGY STAR v2.0
09085	LED-DK6RT-11W830-DIM-G5	750	11W	3000K	80+	7.28"	35K	65W BR	5	★
09086	LED-DK6RT-11W840-DIM-G5	750	11W	4000K	80+	7.28"	35K	65W BR	5	★

★ ENERGY STAR® Approved

**Commercial Downlight** : Dimmable

Order Code	Item	Size	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Notes	Replaces Incan.	Photo #	ENERGY STAR v2.0
09234	CDR-3C-830K-U	6"	2,200	25W	3000K	80+	5.39"	40K	6.1"-6.9" Aperture	(2) 18W CFL	6	★
09235	CDR-3C-835K-U	6"	2,200	25W	3500K	80+	5.39"	40K	6.1"-6.9" Aperture	(2) 18W CFL	6	★
09236	CDR-3C-840K-U	6"	2,200	25W	4000K	80+	5.39"	40K	6.1"-6.9" Aperture	(2) 18W CFL	6	★
09237	CDR-4C-830K-U	8"	3,000	35W	3000K	80+	5.9"	40K	7.8"-8.6" Aperture	(2) 26W CFL	6	★
09238	CDR-4C-835K-U	8"	3,000	35W	3500K	80+	5.9"	40K	7.8"-8.6" Aperture	(2) 26W CFL	6	★
09239	CDR-4C-840K-U	8"	3,000	35W	4000K	80+	5.9"	40K	7.8"-8.6" Aperture	(2) 26W CFL	6	★
09240	CDR-5C-830K-U	10"	4,200	50W	3000K	80+	6.5"	40K	9.4"-10.2" Aperture	(2) 42W CFL	6	★
09241	CDR-5C-835K-U	10"	4,200	50W	3500K	80+	6.5"	40K	9.4"-10.2" Aperture	(2) 42W CFL	6	★
09242	CDR-5C-840K-U	10"	4,200	50W	4000K	80+	6.5"	40K	9.4"-10.2" Aperture	(2) 42W CFL	6	★

★ ENERGY STAR® Approved





## LLH : Linear Highbay

- Solid state LED solution for highbay & lowbay applications
- >118 lpw ultra-high-efficiency delivers superior performance
- Heavy gauge steel body with welded frame construction resists twisting and bowing
- Extremely low profile - only 3.62" overall height
- Universal 0-10V driver for continuous dimming
- Diffuse frosted acrylic lens provides glare control
- 10 ft. Y-toggle aircraft cable mounting hardware
- Wire guard optional for demanding environments

Order Code	Item	Lm	W	CCT	V	Dimming	CRI	MOL	Life/Hrs L70	Replaces	Photo #	DLC v3.1 Premium	DLC v4.0 Standard
09193	LLH-2C-U	13,750	110W	5000K	120-277V	0-10V Dimming	80+	23.8"	70K	4-lamp T8, 250W HID	1	✓	✓
09194	LLH-3C-U	19,280	160W	5000K	120-277V	0-10V Dimming	80+	23.8"	70K	4-lamp T5HO, 6-lamp T8, 400W HID	1	✓	✓
09195	LLH-4C-U	26,730	220W	5000K	120-277V	0-10V Dimming	80+	45.9"	70K	6-lamp T5HO, 8-lamp T8	2	✓	✓

✓ DesignLights Consortium® Qualified (DLC v3.1 Premium valid thru April 2, 2017)

### Adder : Accessories

09226	LLH-CHAIN	Mounting Chain
09227	LLH-PENDANT BOX	Pendant Box
09228	LLH-V HOOK-2C	V-Hook for LLH-2C-U
09229	LLH-V HOOK-3C	V-Hook for LLH-3C-U
09230	LLH-V HOOK-4C	V-Hook for LLH-4C-U
09222	LLH-WG-2C	Wireguard for LLH-2C-U
09223	LLH-WG-3C	Wireguard for LLH-3C-U
09224	LLH-WG-4C	Wireguard for LLH-4C-U
08845	LLH-YTK	Y-Toggle Cable Kit
09419	SEN-OC2	PIR On/Off Occupancy Sensor
09421	SEN-EA2	Extension Adapter for Occupancy Sensor

09336	LLH-CL-2C	Clear Lens for LLH-2C-U
09337	LLH-CL-3C	Clear Lens for LLH-3C-U
09338	LLH-CL-4C	Clear Lens for LLH-4C-U
09339	LLH-FL-2C	Frosted Lens for LLH-2C-U
09340	LLH-FL-3C	Frosted Lens for LLH-3C-U
09341	LLH-FL-4C	Frosted Lens for LLH-4C-U
09417	VPL100-240	Replacement Driver
09414	VPL50-115MVHDA-PD-1C	Replacement Driver for LLH-3C-U

### Replacement Driver Requirements

Fixture	Required Driver(s)
LLH-2C-U	One VPL100-240
LLH-3C-U	One VPL100-240 and one VPL50-115MVHDA-PD-1C
LLH-4C-U	Two VPL100-240





## LRH : Round Highbay

- Cost-effective solid state LED solution for highbay and lowbay applications provides one-for-one replacement of 250W and 400W HID and multi-lamp fluorescent luminaires
- 100 lpw ultra-high-efficiency
- Lightweight construction for quick & easy installation
- Compact low-profile round design with 16" white reflector & 16" overall height allows for mounting in tight spaces
- Die-cast aluminum mounting hook standard
- UL/cUL listed for damp locations
- 5 year limited system warranty

Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	V	Dimming	Replaces HID	Photo #	DLC v4.0
08792	LRH160U	17,929	161W	5000K	70+	12"	60K	120-277V	0-10V Dimming	250-400W	1	✓
08821	LRH160U-347V	17,929	161W	5000K	70+	12"	60K	347V	0-10V Dimming	250-400W	1	
08793	LRH240U	26,433	215W	5000K	70+	12"	60K	120-277V	0-10V Dimming	400W+	1	✓
08822	LRH240-347V	26,433	215W	5000K	70+	12"	60K	347V	0-10V Dimming	400W+	1	✓

✓ DesignLights Consortium® Standard Qualified

### Adder : Accessories

09033	LRH-CBS	Band Clamp for LDP
09032	LRH-LDP	Drop Polycarb Lens
09013	LRH-WG	Wire Guard
09243	LRH-ARL	Acrylic Refractor Lens (see photo 2)
09467	MW-HLG-240H-42A	Driver for LRH240U



5 YEAR WARRANTY

UL US LISTED





## VTS : Vapor Tight Surface

- Cost-effective solid state LED solution for utility lighting applications replacing fluorescent luminaires
- 115 lpw ultra-high-efficiency delivers superior performance over fluorescent and HID
- Universal 120-277V 0-10V driver for dimming control
- Durable polycarbonate lens & housing for demanding environments
- Standard V-hooks included for hanging
- IP65 wet location
- 5 year system warranty

Order Code	Item	Lm	W	CCT	V	Dimming	CRI	MOL	Life/Hrs L70	Replaces Fluorescent	Photo #	DLC v3.1 Premium	DLC v4.0 Standard
09197	VTS-1C-U	4,980	42W	4000K	120-277V	0-10V Dimming	80+	50.24"	50K	(2) F32T8	1	✓	✓
09198	VTS-2C-U	7,198	60W	4000K	120-277V	0-10V Dimming	80+	50.24"	50K	(2) F54T5H0	1	✓	✓

✓ DesignLights Consortium® Qualified (DLC v3.1 Premium valid thru April 2, 2017)

### Adder : Accessories

09415	VPL50-100-MVHDA-PD-1C	Replacement Driver for VTS-1C-U
09416	VEL60170MVHDA-10V-1	Replacement Driver for VTS-2C-U





## AFL : Area Flood Light

- Cost-effective solid state LED solution for flood and area lighting typically replacing 150-400W HID
- Die-cast aluminum housing & door for LED engine with separate driver splice box compartment provides thermal isolation for superior heat dissipation
- Heavy gauge steel adjustable yoke and stainless steel fasteners are standard on all units
- Impact-resistant tempered glass lens
- Compression cord grip & 3' of 16/3 SO cord on all units
- UV stabilized TGIC carbon bronze powder coat finish

Order Code	Item	Lm	W	CCT	V	CRI	MOL	Life/Hrs L70	Notes	Replaces HID	Photo #	DLC v3.1	DLC v4.0
08985	AFL-3C-W-U	14,850	148W	5000K	120-277V	70+	20.7"	60K	NEMA 7x7	150-250W	1	✓	✓
08986	AFL-5C-W-U	20,080	236W	5000K	120-277V	70+	20.7"	60K	NEMA 7x7	250-400W	2	✓	

✓ DesignLights Consortium® Standard Qualified (DLC v3.1 valid thru April 2, 2017)

### Adder : Accessories

08816	AFL-SF	2-3/8" slipfitter
08817	AFL-PM	10" pole mount arm
09289	AL-245W-347T	347V Area Flood Light Higher Power Step Down Transformer (for fixtures 125W to 245W)



5 YEAR WARRANTY

UL US LISTED







## ASL : Area Site Lighter


- Available in two outputs: 12,442lm (replaces 250W HID) and 17,737lm (replaces 400W HID)
- Replaces standard HID area light fixtures with 60% energy savings and 3X lifetime
- Choice of 4000K or 5000K color temperature
- Rotatable glass optics provide flexibility of Type III or Type V beam distribution
- Choice of 2-3/8" adjustable slipfitter, 6" or 10" square pole mounting arms available as adder

Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Notes	Replaces HID	Photo #	DLC v4.0
09273	ASL-3C-40K-U	12,442	95W	4000K	70+	16.2"	60K	Type III, V	250W	1	✓
09275	ASL-5C-40K-U	17,737	144W	4000K	70+	16.2"	60K	Type III, V	400W	1	✓
09274	ASL-3C-50K-U	12,442	95W	5000K	70+	16.2"	60K	Type III, V	250W	1	✓
09276	ASL-5C-50K-U	17,737	144W	5000K	70+	16.2"	60K	Type III, V	400W	1	✓

✓ DesignLights Consortium® Standard Qualified

### Adder : Accessories

09299	ASL-SF	Slipfitter 2-3/8" Adjustable bronze
09300	ASL-PM6	Pole Mount Arm, square 6" bronze
09301	ASL-PM10	Pole Mount Arm, square 10" bronze
09330	AL-125W-347T	347V Area Light Low Power Step Down Transformer (for fixtures up to 125W)
09289	AL-245W-347T	347V Area Flood Light Higher Power Step Down Transformer (for fixtures 125W to 245W)





## FLM : Flood Light Mini

- Replaces 150-300 watt quartz halogen floodlights
- CCT: 5000K; CRI: > 70
- Wide and narrow distributions
- Black ceramic paint frit lens mask reduces glare and improves appearance
- Constructed without any hazardous materials
- Compatible with mechanical relay type photocell and occupancy sensor
- LM-79/80 reports available
- DesignLights Consortium® qualified

Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Notes	Replaces Halogen	Photo #	DLC v3.1
08987	FLM-1C-N-U	1,153	15W	5000K	70+	5.1"	50K	Narrow 75°	150W	1	✓
08988	FLM-1C-U	1,221	15W	5000K	70+	5.1"	50K	Wide 115°	150W	2	✓
09093	FLM-2C-N-LV1	1,860	25W	5000K	70+	6.5"	50K	Narrow 75°	250W	3	
08990	FLM-2C-N-U	1,860	25W	5000K	70+	6.5"	50K	Narrow 75°	250W	3	✓
08991	FLM-2C-U	2,207	25W	5000K	70+	6.5"	50K	Wide 115°	250W	4	✓
09094	FLM-3C-N-LV1	3,634	45W	5000K	70+	6.3"	50K	Narrow 75°	300W	5	
08992	FLM-3C-N-U	3,634	45W	5000K	70+	6.3"	50K	Narrow 75°	300W	5	✓
08993	FLM-3C-U	3,946	45W	5000K	70+	6.3"	50K	Wide 115°	300W	6	✓

✓ DesignLights Consortium® Standard Qualified thru April 2, 2017





## WFA : Wallpack Flood Arch

- Highly adaptable mounting options for ultimate versatility
- Can mount to wall, inverted, flood, bollard, or low-level lighting
- Smooth vertical body architectural styling
- Progressive 2-piece aluminum die-cast construction
- Offered in medium and large housing configurations
- Full cutoff - Night Sky Friendly
- UV stabilized TGIC carbon bronze powder coat finish
- Impact-resistant tempered glass lens
- Stainless steel hardware
- 5 year limited warranty

Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Notes	Replaces HID	Photo #	DLC v3.1	DLC v4.0
08597	WFAM-1C-U	1,910	22W	5000K	70+	8"	50K	Medium	70-150W	1	✓	✓
08598	WFAM-2C-U	3,158	40W	5000K	70+	8"	50K	Medium	175-250W	1	✓	
08599	WFAL-3C-U	7,970	83W	5000K	70+	12.8"	50K	Large	400W	2	✓	

✓ DesignLights Consortium® Standard Qualified (DLC v3.1 valid thru April 2, 2017)

### Adder : Accessories

08704	WFAM-KN	1/2" Knuckle
08703	WFAM-SF	2-3/8" Slipfitter
08705	WFAM-UT	U-Bracket
08706	WFAL-SF	2-3/8" Slipfitter
08707	WFAL-UT	U-Bracket
08738	PCB1	Photocontrol 120V
08739	PCB2	Photocontrol 277V
08867	LP1020-36-C0480	Driver for WFAM-1C-U
08863	LP1040-36-C0950	Driver for WFAM-2C-U





## WPG : Wallpack Glass

- Die-cast aluminum body with traditional HID appearance
- Borosilicate tempered glass lens
- New generation LED module
- UV stabilized powder-coated bronze finish
- UL and CUL listed for wet locations
- 5 year limited warranty

Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Notes	Replaces HID	Photo #	DLC v3.1
08981	WPGS-1C-U	2,598	31W	5000K	70+	9.45"	50K	Small	50-175W	1	✓
08590	WPG-1C-U	3,400	37W	5000K	70+	7.13"	50K	Medium	175-250W	2	✓
08591	WPG-2C-U	5,600	55W	5000K	70+	7.13"	50K	Medium	250-400W	2	✓
08982	WPGL-1C-U	9,795	87W	5000K	70+	9.37"	50K	Large	400W	3	✓
09410	WPGL-1C-U-4K	9,795	87W	4000K	70+	9.37"	50K	Large	400W	3	✓

✓ DesignLights Consortium® Standard Qualified thru April 2, 2017

### Adder : Accessories

08738	PCB1	Photocontrol 120V
08739	PCB2	Photocontrol 277V
08746	WP-347T	347V Wallpack Step Down Transformer (Glass and Trapezoid Only)
08866	LP1040-36-C0700	Driver for WPG-2C-U
08865	LP1040-36-C0900	Driver for WPG-1C-U



5 YEAR WARRANTY

UL US LISTED





## WPT : Wallpack Trapezoid

- Die-cast aluminum body
- Full cutoff optics prevents neighborhood light trespass; item is night sky friendly
- Heat- and impact-resistant tempered glass
- 5000K color temperature
- IC protection
- UL and CUL listed for wet locations

Order Code	Item	Lm	W	CCT	V	CRI	MOL	Life/Hrs L70	Replaces HID	Photo #	DLC v3.1
08595	WPT-1C-U	2,998	37W	5000K	120-277V	70+	9.25"	50K	175-250W	1	✓
08596	WPT-2C-U	6,449	75W	5000K	120-277V	70+	9.25"	50K	250-400W	1	✓

✓ DesignLights Consortium® Standard Qualified thru April 2, 2017

### Adder : Accessories

08738	PCB1	Photocontrol 120V
08739	PCB2	Photocontrol 277V
08746	WP-347T	347V Wallpack Step Down Transformer (Glass and Trapezoid Only)
08865	LP1040-36-C0900	Driver for WPT-1C-U and WPT-2C-U





## DTD : Dusk-to-Dawn

- Cost-effective LED solution for general security lighting
- 90% energy savings vs. traditional HID sources
- 13 years of maintenance-free operation with LED lifespan of 50,000 hours
- Instant-on with no warm-up, unlike HID
- Universal 120-277V photo control provides nighttime ON / daytime OFF
- Polyester powder coat finish for extra corrosion protection
- Impact resistant, non-yellowing polycarbonate lens
- Suitable for wall or pole mount applications

Order Code	Item	Lm	W	CCT	V	CRI	MOL	Life/Hrs L70	Notes	Replaces HID	Photo #	DLC v3.1	DLC v4.0
08588	DTD-1C-U	3,194	42W	5000K	120-277V	70+	13.9"	50K	w/ 120-277V photocell	50-175W	1	✓	
08980	DTD-2C-U	5,441	58W	5000K	120-277V	70+	13.9"	50K	w/ 120-277V photocell	175-250W	1		✓

✓ DesignLights Consortium® Standard Qualified (DLC v3.1 valid thru April 2, 2017)

### Adder : Accessories

08702	DTD-ARM	21" conduit arm
08906	PCTLU	Photocontrol 122-277V



5 YEAR WARRANTY

UL US LISTED





## WPC : Wallpack Cube

- Economical and energy-efficient LED solution for general purpose wall mount lighting
- Durable die-cast aluminum housing with vandal-resistant polycarbonate prismatic reflector
- UV stabilized TGIC carbon bronze powder coat finish
- Fully sealed and gasketed, wet location rated
- Enclosure and hardware are corrosion resistant
- 120V dusk-to-dawn button type photocontrol included (standard)
- 5 year limited warranty

Order Code	Item	Lm	W	CCT	V	CRI	MOL	Life/Hrs L70	Notes	Replaces HID	Photo #
<b>08873</b>	WPC-1C-120	770	14W	5000K	120V only	70+	11.02"	50K	w/ 120V photocell	50W	1
<b>09424</b>	WPC-2C-120*	1,800	20W	5000K	120V only	70+	11.02"	50K	w/ 120V photocell	50W-70W	2

\*Available December 2016

### Adder : Accessories

**08864** LP1013-36-C0300 Driver for WPC-1C-120



5 YEAR WARRANTY

cUL US LISTED



## WPW : Wallpack Wedge

- Economical general purpose wall mount lighting
- Dusk-to-dawn button type photo control included
- Ideal for over doors and entry ways
- Full cutoff optics prevents light trespass
- Chip-on-board LED performance
- Impact-resistant polycarbonate lens
- Die-cast aluminum construction with durable polyester powder coat bronze finish
- Quick mount hardware allows for quick installation
- Weatherproof seal prevents water & bug penetration

Order Code	Item	Lm	W	CCT	V	CRI	MOL	Life/Hrs L70	Notes	Replaces Incan.	Photo #	DLC v3.1
08589	WPW-1C-120	828	11W	5000K	120V only	70+	7.08"	50K	w/ 120V photocell	60W	1	✓

✓ DesignLights Consortium® Standard Qualified thru April 2, 2017

### Adder : Accessories

08864 LP1013-36-C0300 Driver for WPW-1C-120



5 YEAR WARRANTY

UL US LISTED







## SCSS : Surface Canopy Square, Small/Shallow

- Shallow design housing combines contemporary aesthetics with LED performance
- Solid die-cast aluminum construction
- Impact-resistant polycarbonate lens
- Unique quick mount design
- UV stabilized bronze powder coat finish
- Extremely low profile is ideal for confined spaces
- 5000K color temperature

Order Code	Item	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Size	Replaces HID	Photo #	DLC v4.0
08787	SCSS-1C-U	4,803	40W	5000K	70+	3.75"	50K	10.3"	50-175W	1	✓
09004	SCSS-2C-U	6,375	58W	5100K	70+	3.75"	50K	10.3"	175-250W	1	✓
09448	SCSS-3C-50K-U*	9,778	86W	5000K	70+	3.75"	50K	14.0"	150W	2	
09449	SCSS-4C-50K-U*	12,695	117W	5000K	70+	3.75"	50K	14.0"	250W	2	

\*Available Q4 2016

✓ DesignLights Consortium® Standard Qualified

### Adder : Accessories

08738	PCB1	Photocontrol 120V
08739	PCB2	Photocontrol 277V





## SCRS : Surface Canopy Round, Shallow

- Shallow design housing combines contemporary aesthetics with LED performance
- Solid die-cast aluminum construction
- Impact-resistant polycarbonate lens
- Unique quick mount design
- UV stabilized bronze powder coat finish
- Extremely low profile is ideal for confined spaces
- 5000K color temperature

Order Code	Item	Lm	W	CCT	CRI	Life/Hrs L70	Size	Replaces HID	Photo #	DLC v4.0
09422	SCRS-2C-U	3,843	41W	5000K	70+	50K	11"	50-175W	1	✓
09423	SCRS-3C-U	5,770	57W	5000K	70+	50K	11"	175-250W	1	✓

✓ DesignLights Consortium® Standard Qualified

### Adder : Accessories

08738	PCB1	Photocontrol 120V
08739	PCB2	Photocontrol 277V



5 YEAR WARRANTY

UL US LISTED

DLC LISTED



## SCSM/L : Surface Canopy Square, Medium/Large

- UV Stabilized TGIC carbon bronze powder coat finish (standard)
- UL/cUL Listed for wet locations
- Unique quick mount design
- Frosted PC impact-resistant lens for uniform lighting
- Low starting temp: -40°C

Order Code	Item	Size	Lm	W	CCT	CRI	MOL	Life/Hrs L70	Replaces HID	Photo #	DLC v3.1	DLC v4.0
09001	SCSM-1C-U	Medium	2,322	22W	5000K	70+	7.1"	50K	50-100W	2		
09008	SCSM-1C-347V	Medium	2,322	22W	5000K	70+	7.1"	50K	50-100W	2	✓	✓
09002	SCSL-1C-U	Large	3,906	40W	5000K	70+	8.9"	50K	50-175W	3	✓	✓
09006	SCSL-1C-347V	Large	3,906	40W	5000K	70+	8.9"	50K	50-175W	3	✓	✓
09003	SCSL-2C-U	Large	4,285	55W	5000K	70+	8.9"	50K	250-400W	3	✓	
09007	SCSL-2C-347V	Large	4,285	55W	5000K	70+	8.9"	50K	250-400W	3		

✓ DesignLights Consortium® Standard Qualified (DLC v3.1 valid thru April 2, 2017)

### Adder : Accessories

08738	PCB1	Photocontrol 120V	08863	LP1040-36-C0950	Driver for SCSL-1C-U
08739	PCB2	Photocontrol 277V	09335	SCSL-LENS	Replacement Lens



## Guaranteed sale!

Move products out the door with Eiko's wire rack displays! Available in three recommended layouts and interchangeable header cards, you will have the option to pick and choose from our broad selection of LitespanLED® replacement lamps and fixtures – all guaranteed to facilitate sales!

### LED Lamp and Fixture Merchandisers

Order Code	Item	Lamp Option	Fixture Option	Lamp & Fixture Option	Photo(s)
<b>60424</b>	LED9WA19/OMN/827K-DIM-G7 2PK	2		2	 <p>Lamp Option</p>
<b>60425</b>	LED9WA19/OMN/830K-DIM-G7 2PK	2		2	
<b>60426</b>	LED9WA19/OMN/840K-DIM-G7 2PK	2		2	
<b>60433</b>	LED15WA21/OMN/827K-DIM-G7 2PK	2			
<b>60434</b>	LED15WA21/OMN/830K-DIM-G7 2PK	2			
<b>60435</b>	LED15WA21/OMN/840K-DIM-G7 2PK	2			
<b>60401</b>	LED9WA19/ADV/827K-DIM-G7 2PK	2			
<b>60402</b>	LED9WA19/ADV/830K-DIM-G7 2PK	2			
<b>60403</b>	LED9WA19/ADV/840K-DIM-G7 2PK	2			
<b>08936</b>	LED11WBR30/827K-DIM-G5	4		6	 <p>Fixture Option</p>
<b>08937</b>	LED11WBR30/830K-DIM-G5	4		6	
<b>90043</b>	LED17WPAR38/FL/830K-DIM-G4A	4			
<b>09156</b>	LED11WPAR30/FL/830K-DIM-G6	4			
<b>09185</b>	LED7WPAR20/FL/830K-DIM-G6	8			
<b>09374</b>	LED27WPT40KMED-G7	4		4	
<b>09387</b>	LED54WPT40KMOG-G7	4		4	
<b>09383</b>	LED45WPT40KMOG-G7	4			
<b>08729</b>	LED5WB11/E12/827-DIM-G5	12			
<b>08730</b>	LED5WB11/E12/830-DIM-G5	12			
<b>09077</b>	LED-DK4-10W830-DIM-G5	8			 <p>Lamp &amp; Fixture Option</p>
<b>09078</b>	LED-DK4-10W840-DIM-G5	8			
<b>09081</b>	LED-DK6-17W830-DIM-G5	8			
<b>09082</b>	LED-DK6-17W840-DIM-G5	8			
<b>09087</b>	LED-DKD-13W830-DIM-G5	12			
<b>09088</b>	LED-DKD-13W840-DIM-G5	12			
<b>08590</b>	WPG-1C-U		6	4	
<b>08591</b>	WPG-2C-U		6		
<b>08588</b>	DTD-1C-U		6	4	
<b>08787</b>	SCSS-1C-U		4		
<b>08873</b>	WPC-1C-120		2		
<b>08991</b>	FLM-2C-U		4		

# EiKO USA: Terms, Conditions, & Shipping Procedures

**Effective:** October 1, 2016.

Supersedes all past terms and conditions of Price books and Sales Supplements.

**Prices:** As Shown and subject to change without notice.

**Distributor Status:** Distributors must purchase a minimum of \$3,500 annually in order to maintain distributor status.

**Small Order Charge:** Orders under \$250 will be assessed a \$15 small order charge (SOC).

**Payment Terms:** Net 30 days, from date of shipment as it appears on invoice. Postmark date on envelope will determine if payment has been made within terms. All orders received are subject to review and approval by our credit department. Orders received from customers with delinquent accounts may be subject to shipping delays, so please keep your account current.

**Freight:** NOTE: SoLux and EiKO products may be combined to meet prepaid freight requirements. EiKO Global, LLC will select the carrier of its choice.

1. All orders of \$1,000 or more will be shipped FREE FREIGHT F.O.B. destination via regular ground UPS, FedEx or USPS within the continental United States. Orders less than \$1,000 will be shipped F.O.B. origin.
2. UPS Second Day Air Blue - At the request of the distributor, orders will be billed at the UPS Second Day Air Rate.
3. UPS Next Day Air Red Label - At the request of the distributors, orders will be billed at the UPS Red Label Air rate.
4. Shipments made at the choice of the distributors, other than above, will be shipped F.O.B. shipping point.
5. Additional charges will apply for residential delivery.
6. Alaska, Hawaii and Puerto Rico - Orders of \$1,000 or more will be shipped free freight F.O.B. to a freight forwarder.
7. EiKO will no longer ship freight collect using the customer's account number.

We will cover the above items under normal Continental United States Policy. Therefore, you can achieve free freight to a border destination and then pick up the expense of forwarding the freight to your destination in Alaska, Hawaii or Puerto Rico. As an example, if you are a customer in Hawaii, you can have the goods for orders over \$1,000 shipped free freight to a freight forwarder. It would then be your responsibility to cover the freight to Hawaii.

## Return Authorization:

1. You must contact EiKO Global, LLC for authorization to return defective products and shipment errors.
2. Return authorization will not be issued unless the distributor provides a valid invoice number showing when goods were purchased. A copy of this invoice must be included with the return.
3. Goods must be less than one year old to be eligible for return.
4. Where the request for return is neither defective merchandise nor error made by EiKO Global, LLC, the following policy will apply:  
A restocking charge of 20% will be charged on all authorized and acceptable goods. If goods are not returned in resalable condition they will be returned to the sender at the expense of the sender and no credit will be issued.

NOTE: All returns must have a return number on the outside of the box or they will be refused.

**Shipment Discrepancies:** All shipment discrepancies, damage, etc, must be reported within 10 days of the shipment date shown on the invoice.

**General:** We reserve the right to, at any time and without notice, discontinue or substitute brands.

**Minimum Order Requirements for Linear Fluorescent Lamps:** In order to avoid breakage, the minimum order quantity for T8 & T12 linear fluorescent lamps four feet or longer is 360. The minimum order quantity for programmed start T5 linear fluorescent lamps is 100. Mixing SKUs to meet the minimum order is allowed. Orders under \$1,000 will be charged \$70 LTL freight.

**\*Important Note About Minimum Advertised Pricing (MAPP):** In order to avoid predatory pricing and to maintain the integrity of the products, SoLux products purchased through EiKO Global, LLC may not be advertised for sale (Internet, electronic, print media, mailings or otherwise) by you, a sub-distributor or any other agent, below the minimum advertised price established in the current Distributor Net Price Schedule. This minimum advertised price will be known as and referred to as the MAPP price. Failure to comply with MAPP pricing requirements will result in the loss of your access to SoLux products.

**EiKO Global, LLC:** 23220 W. 84th St, Shawnee, KS 66227 • Ph: 1.800.852.2217 • F: 1.913.441.6679 • Email: eiko@eiko.com

eiko.com

# EiKO Canada: Terms, Conditions, & Shipping Procedures

**Effective:** October 1, 2016.

Supersedes all previously issued copies.

**Ordering:** All orders should be emailed to [orderdesk@eiko.com](mailto:orderdesk@eiko.com) or faxed to EiKO at 1-888-705-1335.

All orders received are subject to review and approval by our credit department.

**Distributor Status:** Distributors must purchase a minimum of \$1500.00 annually to maintain distributor status.

**Prices:** All prices are payable in Canadian funds. Prices are subject to change without notice and do not include applicable taxes. Any applicable taxes will be added to the invoice.

**Minimum Order:** \$75.00 minimum order requirement.

**Payment Terms:** Net 30 Days, from date of shipment as it appears on the invoice. Postmark date on envelope will determine if payment has been made within terms. All payments must be made in Canadian funds and mailed to below. EFT is available upon request.

EiKO Global, LLC (Canada)  
81 King Street  
Barrie, Ontario, L4N 6B5

**Freight Terms:** All pre-paid orders will be shipped F.O.B. destination via ground service and the carrier will be determined by Eiko Canada Ltd. Orders that do not meet the pre-paid amount will be shipped at customer's expense. At the request and expense of customer, orders can be shipped via air service. At the request of customer, orders can be drop shipped and pre-paid amounts will apply to shipping destination.

F.O.B Barrie, pre-paid as follows (before taxes):

British Columbia \$1,000.00	New Brunswick \$1,000.00
Alberta \$1,000.00	Nova Scotia \$1,000.00
Saskatchewan \$1,000.00	Prince Edward Island \$1,000.00
Manitoba \$750.00	Newfoundland and Labrador \$1,500.00
Ontario \$500.00	Yukon \$1,500.00
Montreal (Metropolitan Area) \$500.00	Northwest Territories \$1,500.00
All other points in Quebec \$750.00	Nunavut \$1,500.00

**NOTE:** - Pre-paid freight is \$1,000.00 in Ontario, Quebec and Manitoba when ordering Fluorescent or LED tubes 4 feet or longer.

- Expedited ground freight is available upon request for Western Canada. Pre-paid freight is \$1500.00.

**Shipment Discrepancies/Damages:** EiKO will credit or replace product found to arrive in damaged or broken condition on all pre-paid freight orders. All shipment discrepancies, damage, etc., must be reported within 10 days of the shipment date shown on the invoice.

**Return Authorizations:** You must contact EiKO within 90 days of delivery for a Return Authorization number. An RA number will only be provided if the customer has a valid invoice showing when the goods were purchased from EiKO. Goods must be less than one year old to be eligible for return. All returns must be shipped pre-paid with a copy of the invoice and RA included. A restocking charge of 25% will be charged on all authorized and acceptable goods. An order of 2 times the return value will be accepted as an offset to the restocking charge. Goods returned not in original packaging and not in resalable condition will be returned to sender, at the expense of the sender, and no credit will be issued.

**General:** EiKO reserves the right to discontinue and substitute brands at any time without notice.

**EiKO Global Canada, LLC:** 81 King St, Barrie, ON L4N 6B5 • Ph: 1.705.721.5189 • F: 1.705.721.7855 • Email: [orderdesk@eiko.com](mailto:orderdesk@eiko.com)

[eiko.com](http://eiko.com)

# General Lighting Limited Warranty

EiKO brand lamps are warranted to be free of defective materials and workmanship for the period listed below. EiKO will replace or credit the distributor only for the cost of any lamp that fails under normal operating conditions and the use and operation conditions below due to defective materials or workmanship.

**This warranty is limited to the replacement or credit of the lamp itself. This is buyer's exclusive remedy. Any other warranty, express or implied, including any warranty of merchantability or fitness for a particular purpose, is excluded and disclaimed. EiKO shall not be liable for any special, incidental or consequential damage including labor, loss of use, lost profits or injury to persons or property.**

EiKO reserves the right to examine all lamps prior to the determination of warranty status. All lamps must be retained for warranty claims. The warranty period starts on the date of installation. If the date of installation is unknown or undetermined the warranty period will start at the wholesale purchase date.

Lamp Category	Warranty Period
LitespanLED® Line	60 months
Advantage™ Line	36 months
Metal Halide, High-Pressure Sodium, Mercury Vapor	15 months
Compact Fluorescent	12 months
Self Ballasted Compact Fluorescent	12 months
Linear Fluorescent (below 14 watt)	12 months
Linear Fluorescent (14 watt and above)	24 months
LCD	120 days

Credit is calculated as follows:

Credit (\$) = Invoiced Purchase Price (\$) x Unexpired Original Warranty Period (months)/Warranty Period

**Use and Operating Conditions:** Lamps must be used in UL approved fixtures with UL approved ballasts and installed according to local and national codes and standards. Use of occupancy sensors, dimmers or programmable systems with the lamp may void the warranty.


**HID Lamps:** Warranty is based on 5,000 hours per year maximum operation with a minimum of 8 hours operation per cycle. More frequent cycles will shorten lamp life and may not be covered under this warranty.

**Fluorescent Lamps:** Warranty is based on 4,000 hours per year maximum operation with a minimum of 3 hours operation per cycle. More frequent cycles will shorten lamp life and may not be covered under this warranty.

**Large Lamps:** Warranty is in effect for sales and installations on and after January 1, 2006.

**LED:** Warranty is in effect for sales and installations on and after July 1, 2010.

**LCD:** Warranty is in effect for sales and installations on and after July 1, 2009.

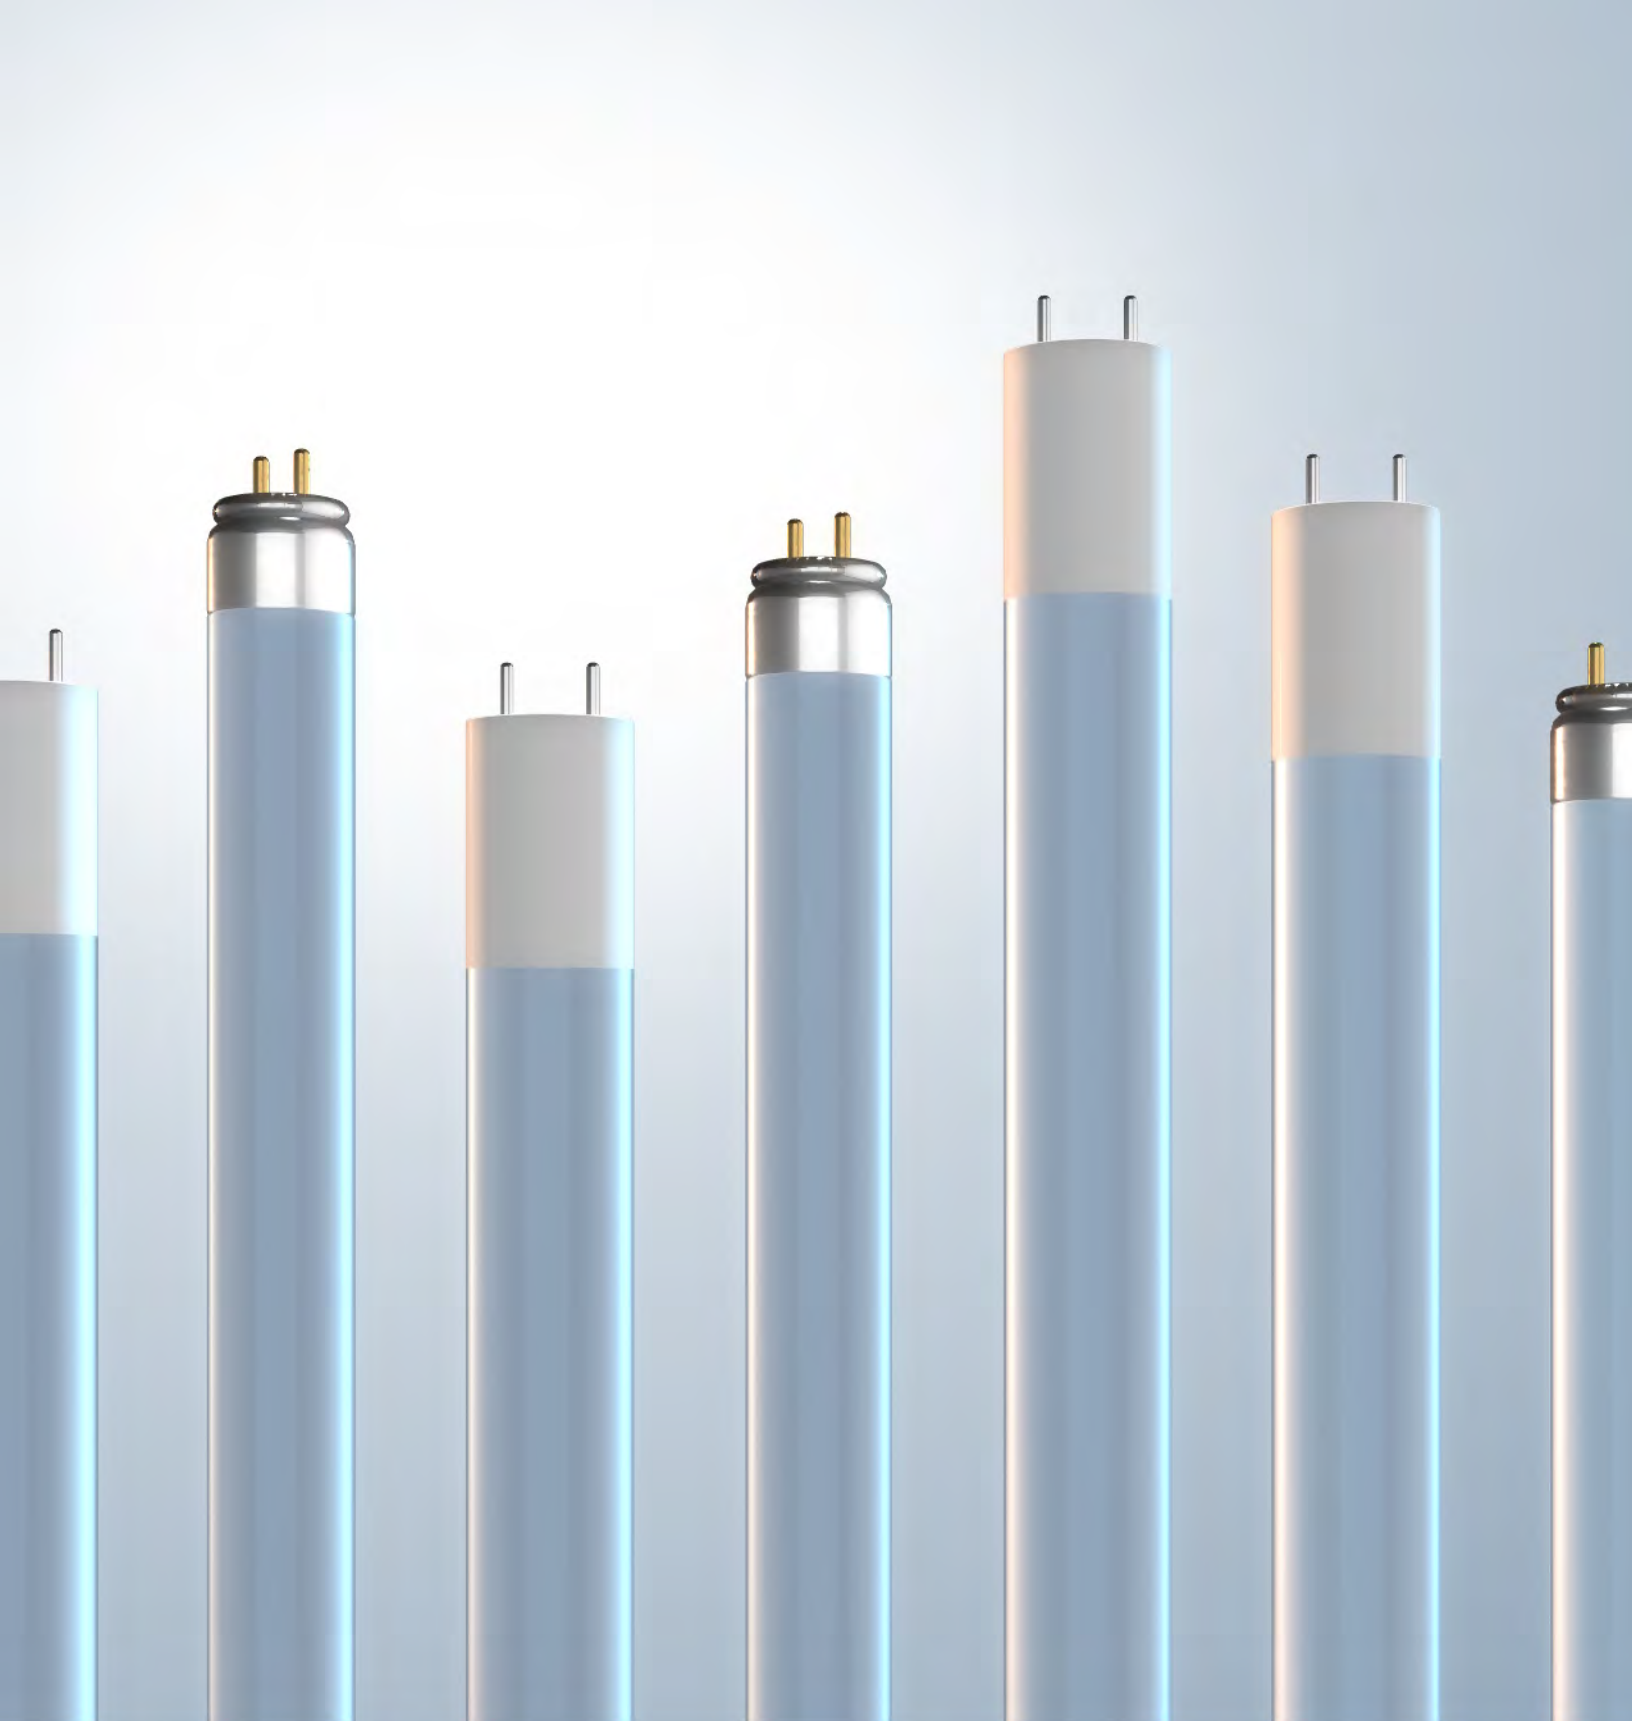

[watch](#) > [like](#) > [follow](#) >



---

23220 W. 84<sup>th</sup> St, Shawnee, KS 66227 · (P) 1.800.852.2217 · (F) 1.800.492.8975  
Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 · (F) 1.888.705.1335